RNAV (GPS) Z RWY 27L

CHICAGO O'HARE INTL (ORD)

WAAS	APP CRS	Rwy Ldg	11260
CH 77804	273°	TDZE	654
W27A		Apt Elev	680


RNP APCH - GPS.

Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C.


ALSF-2

MISSED APPROACH: Climb to 4000 direct WASCO and hold.

D-ATIS	CHICAGO APP CON	O'HARE TOWER	GND CON	(TWR CENTER)
135.4 282.225	119.0 292.125	126.9 348.0	124.125 (TWR NORTH) 118.05 (TWR SOUTH) 226.675 (ALL TWRS)	121.75 (OBND) 121.9 (IBND)

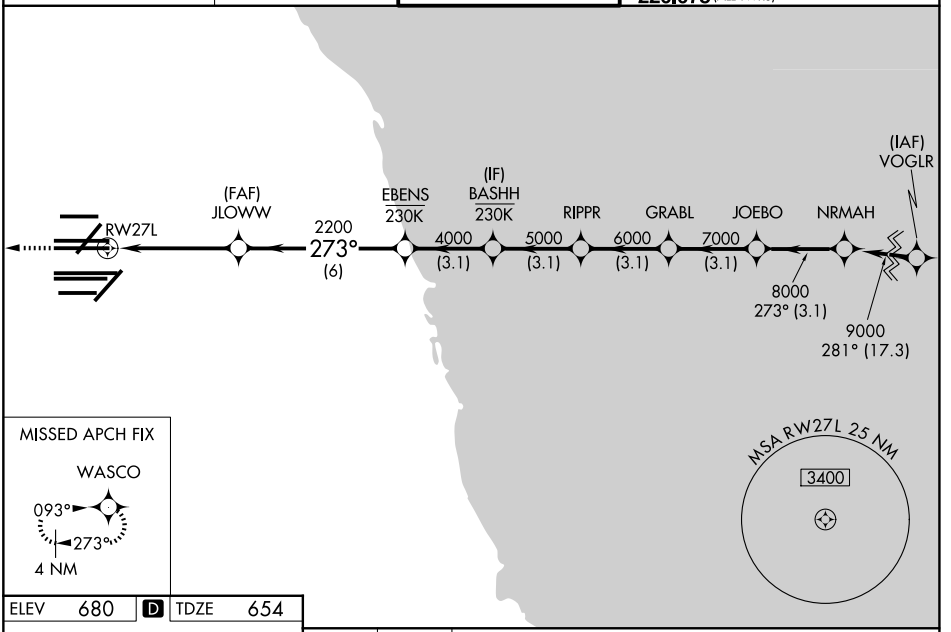


ELEV 680 D TDZE 654

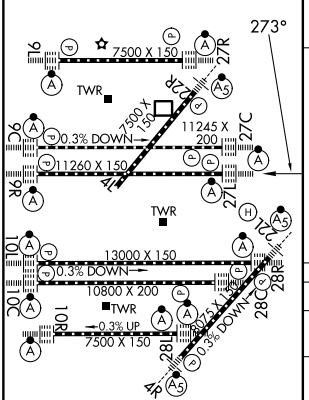

4000 WASCO

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).

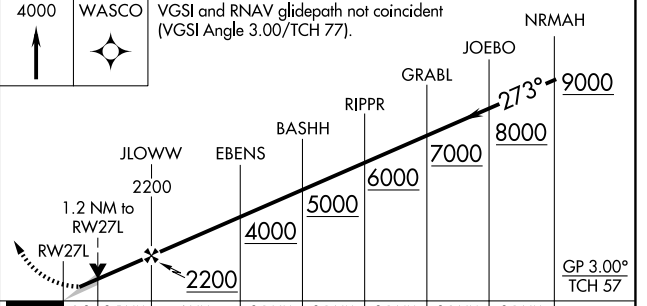

CATEGORY	A	B	C	D
LPV DA	854/18 200 (200-½)			
LNAV/VNAV DA	1088/40 434 (500-¾)			
LNAV MDA	1100/24 446 (500-½)		1100/45 446 (500-⅞)	

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026