RNAV (GPS) RWY 5

DONALDSON FLD (GYH)

WAAS CH 72603 W05A	APP CRS 047°	Rwy Ldg 8000 TDZE 956 Apt Elev 956


RNP APCH - GPS.


Baro-VNAV and VDP NA when using Greer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Greer altimeter setting and increase LPV DA to 1185 feet; increase LNAV/VNAV DA to 1279; increase all MDAs 40 feet and LNAV visibility Cats C and D ⅛ SM. For inop ALS, increase LNAV/VNAV visibility all Cats to ⅞ SM and increase LNAV visibility Cats C/D to 1 ⅛ SM.

MALSR


MISSED APPROACH: Climb to 3000 direct ILEYO and hold.

ATIS	GREER APP CON★	DONALDSON TOWER★	GND CON	UNICOM
127.325	118.8 270.275	133.325 (CTAF) L 269.25	121.4	122.7

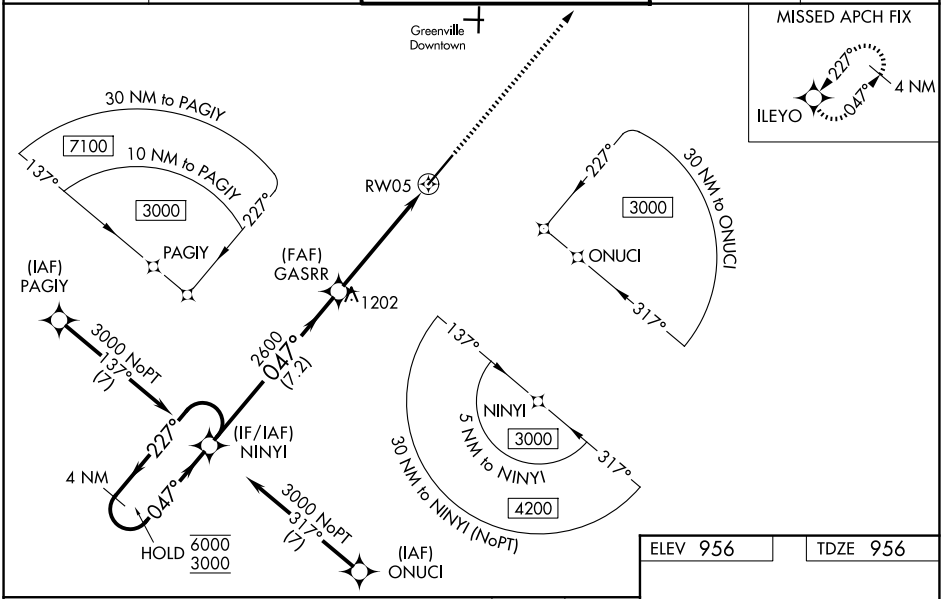

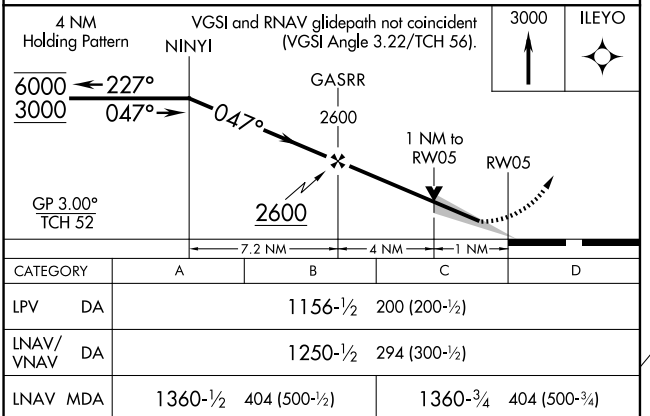

CATEGORY	A	B	C	D
LPV DA	1156-½ 200 (200-½)			
LNAV/VNAV DA	1250-½ 294 (300-½)			
LNAV MDA	1360-½ 404 (500-½)		1360-¾ 404 (500-¾)	
CIRCLING	1420-1 464 (500-1)	1480-1 524 (600-1)	1480-1½ 524 (600-1½)	1520-2 564 (600-2)

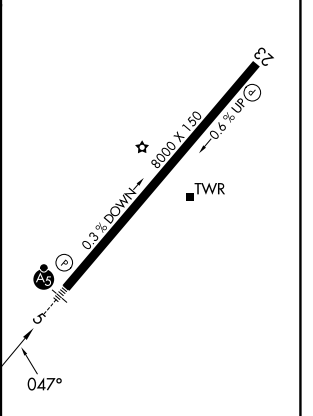

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026