WAAS CH **53413** **W01A** | APP CRS **006°** | Rwy Ldg **5393** TDZE **1015** Apt Elev **1048**


RNAV (GPS) RWY 1
GREENVILLE DOWNTOWN (GMU)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Greer altimeter setting. When local altimeter setting not received, use Greer altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase LPV and LNAV/VNAV all Cats, LNAV Cat D and Circling Cat C visibility ¼ mile. Inop table does not apply to LNAV/VNAV all Cats and LNAV Cat C.


MALSF

MISSED APPROACH: Climb to 3400 direct GEBLL and via track 060° to PELAM and hold.

ATIS	GREER APP CON ★	GREENVILLE TOWER ★	GND CON	UNICOM
127.075	118.8 270.275	119.9 (CTAF) L 257.7	121.25	122.95

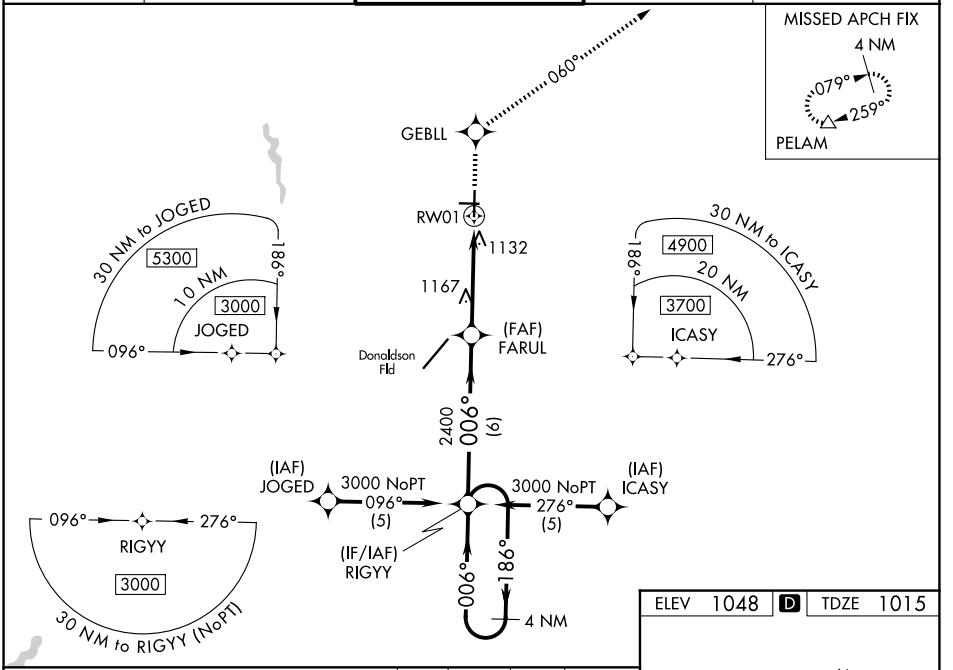

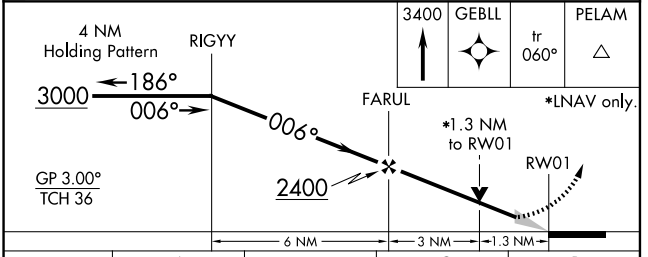

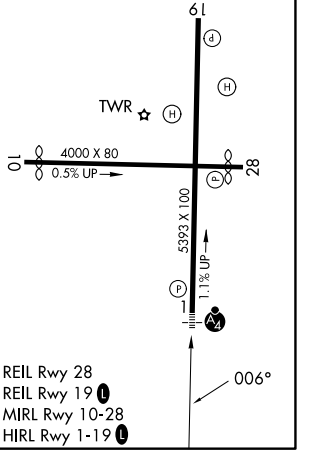

CATEGORY	A	B	C	D
LPV DA	1215-¾ 200 (200-¾)			
LNAV/VNAV DA	1415-1½ 400 (400-1½)			
LNAV MDA	1440-¾ 425 (400-¾)		1440-1¼ 425 (400-1¼)	
CIRCLING	1620-1 572 (600-1)		1780-2 732 (800-2)	1860-2¾ 812 (900-2¾)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026