RNAV (GPS) RWY 25

EUGENE F KRANZ TOLEDO EXPRESS (TOL)

WAAS	APP CRS	Rwy Ldg	10599
CH 48899	252°	TDZE	678
W25A		Apt Elev	683

RNP APCH - GPS.


ASR

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats to RVR 6000, and LNAV Cats C/D/E to RVR 5500.
** RVR 1800 authorized with the use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 3000 direct ATVIY and hold.


ATIS	TOLEDO APP CON	TOLEDO TOWER	GND CON
118.75 290.225	134.35 317.55	118.1 285.4	121.9 348.6

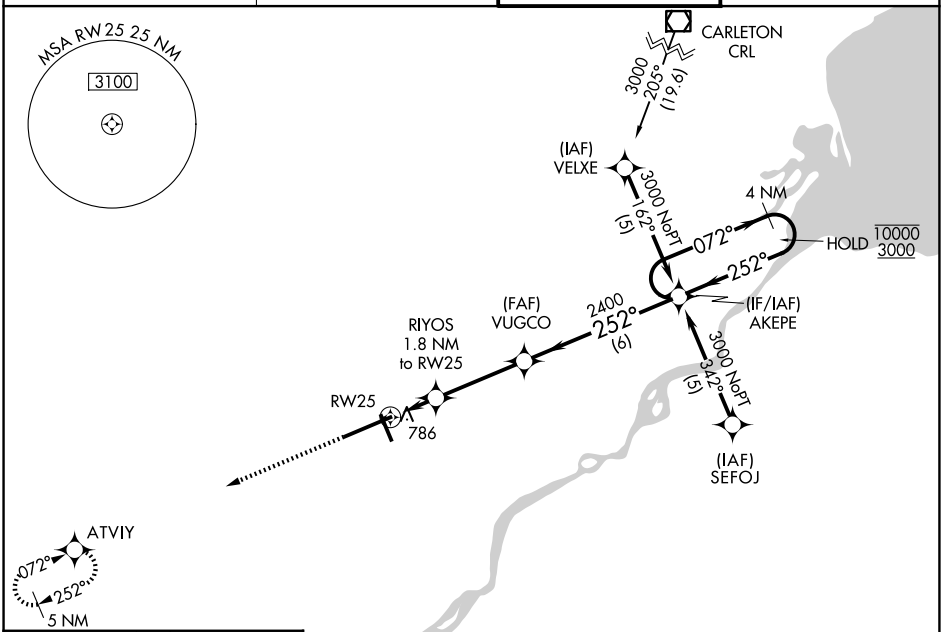

ELEV 683 D TDZE 678



TDZ/CL Rwy 7
HIRL Rwy 7-25
MIRL Rwy 16-34
REIL Rwys 16 and 34

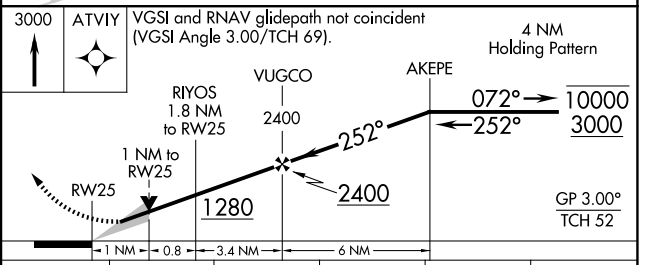

CATEGORY	A	B	C	D	E
LPV DA**	878/24 200 (200-½)				
LNAV/VNAV DA	1065/50 387 (400-1)				
LNAV MDA	1040/24 362 (400-½)		1040/35 362 (400-⅝)	1040/50 362 (400-1)	
CIRCLING	1200-1 517 (600-1)		1300-1¾ 617 (700-1¾)	1360-2¼ 677 (700-2¼)	1360-2½ 677 (700-2½)

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026