RNAV (GPS) RWY 7

EUGENE F KRANZ TOLEDO EXPRESS (TOL)

WAAS	APP CRS	Rwy Ldg	10599
CH 99399	072°	TDZE	683
W07A		Apt Elev	683

RNP APCH - GPS.


ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 52°C. For inop ALS, increase LPV all Cats visibility to RVR 5000, LNAV/VNAV all Cats to 1⅜ SM, and LNAV Cats C/D to 1⅜ SM. Increase LNAV/VNAV Cat E and LNAV Cat E visibility to 1⅜ SM.

ALSF-2


MISSED APPROACH: Climb to 3000 direct AKEPE and hold.

ATIS	TOLEDO APP CON	TOLEDO TOWER	GND CON
118.75 290.225	134.35 317.55	118.1 285.4	121.9 348.6

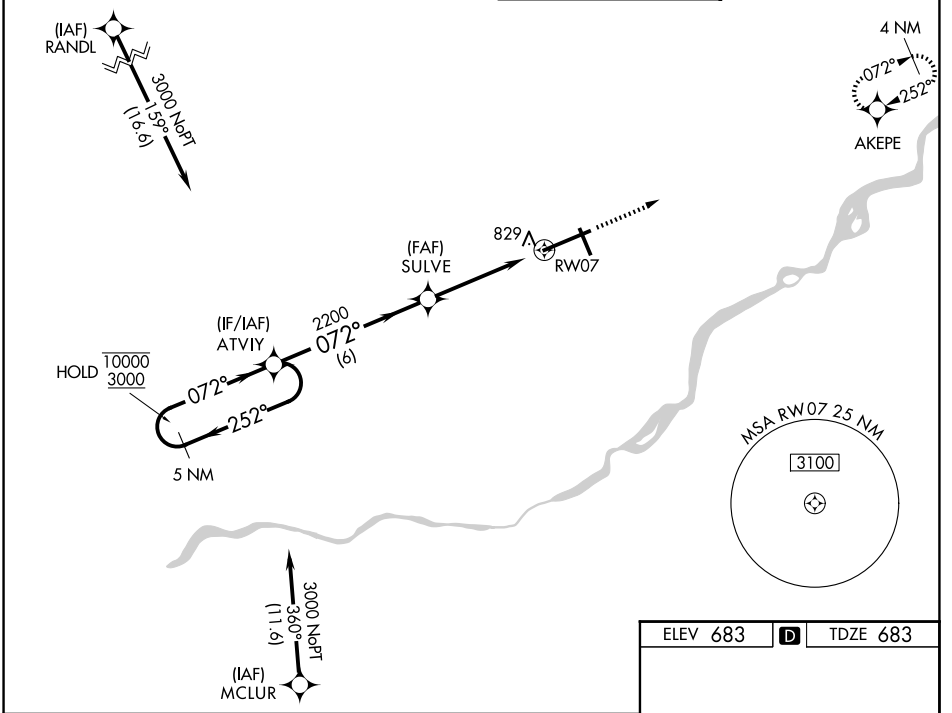

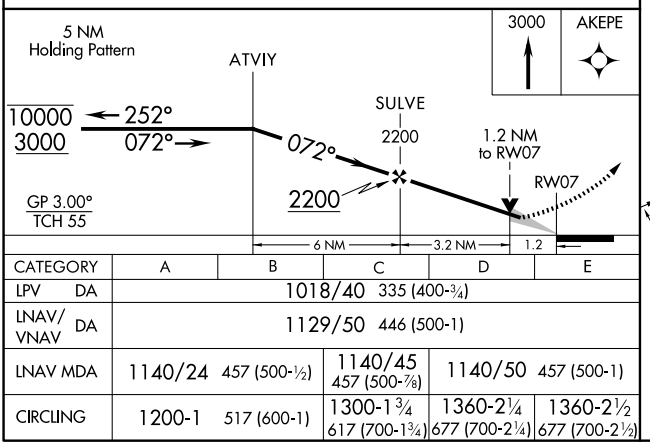

CATEGORY	A	B	C	D	E
LPV DA	1018/40 335 (400-¾)				
LNAV/VNAV DA	1129/50 446 (500-1)				
LNAV MDA	1140/24 457 (500-½)		1140/45 457 (500-⅞)	1140/50 457 (500-1)	
CIRCLING	1200-1 517 (600-1)		1300-1¾ 617 (700-1¾)	1360-2¼ 677 (700-2¼)	1360-2½ 677 (700-2½)

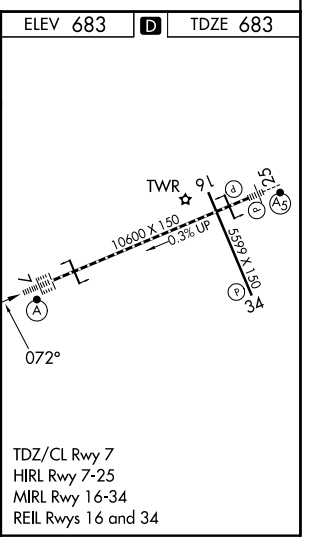

TDZ/CL Rwy 7
HIRL Rwy 7-25
MIRL Rwy 16-34
REIL Rwys 16 and 34

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026