HOUSTON, TEXAS

HI-ILS Y or LOC Y RWY 35L

LOC I-EFD	APCH CRS	Rwy Idg / TDZE / Arpt Elev
111.1	354°	9001 / 28 / 33

[USAF] ELLINGTON (KEFD)

DME required. RADAR required for procedure entry.
▼ * When ALS inop, increase CAT CDE RVR to 60.
** Circling not authorized W of rwy 17L-35R

MALSF

MISSED APPROACH: Climb to 500 then climbing right turn to 3100 via EFD TACAN R-136 to WATFO/EFD 16 DME and hold.

ATIS	HOUSTON APP CON	TOWER	GND CON
135.575 269.9	134.45 284.0	126.05 253.5	121.6 275.8

EFD TACAN	N29°36.36′ W95°09.58′
CANDI	N29°39.24′ W95°18.17′
DROPP	N29°13.63′ W95°32.07′
WATFO	N29°23.90′ W94°58.07′

IAF ELLINGTON Chan 31 EFD

LOCALIZER 111.1 I-EFD

(IAF) CANDI EFD 8 16,000

(IF) PAHSU RADAR EFD 15

(IAF) DROPP EFD 30 16,000

(IAF) ANRUY EFD 30 15,000

JUVUM EFD 2.5 14,000 12,000

MARZY RADAR EFD 7

PAHSU RADAR EFD 15

KOREJ EFD 18

EDEDY EFD 18

EDF 18


WATFO EFD 16

OKUME EFD 30


TRINITY 114.75 MHF Chan 94(Y)


DME from EFD TACAN, simultaneous reception of I-EFD and EFD DME required.

EMERG SAFE ALT 100 NM 16,000

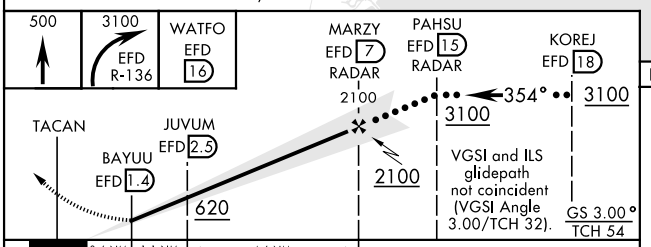

CATEGORY	C	D	E
S-ILS 35L	228/40	200	(200-¾)
S-LOC 35L *	440/50	412	(500-1)
C CIRCLING **	580-1½ 547 (600-1½)	640-2 607 (700-2)	700-2¼ 667 (700-2¼)

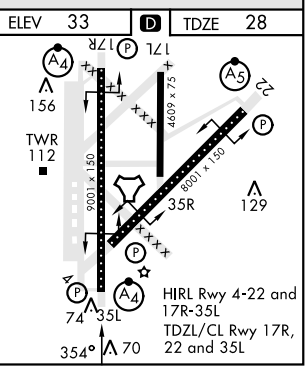



HOUSTON, TEXAS 29°36′N-95°10′W ELLINGTON (KEFD)

Amdt 4A 15AUG19

HI-ILS Y or LOC Y RWY 35L

SC-5, 29 OCT 2026 to 26 NOV 2026