RNAV (GPS) RWY 22

ELLINGTON (EFD)

WAAS	APP CRS	Rwy Ldg	8001
CH 61111	219°	TDZE	31
W22A		Apt Elev	33


RNP APCH.

Circling NA west of Rwy 17R - 35L. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C/D/E visibility to RVR 5500.


MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 3100 direct WATFO and hold.


ATIS	HOUSTON APP CON	ELLINGTON TOWER	GND CON
135.575 269.9	134.45 284.0	126.05 253.5	121.6 275.8

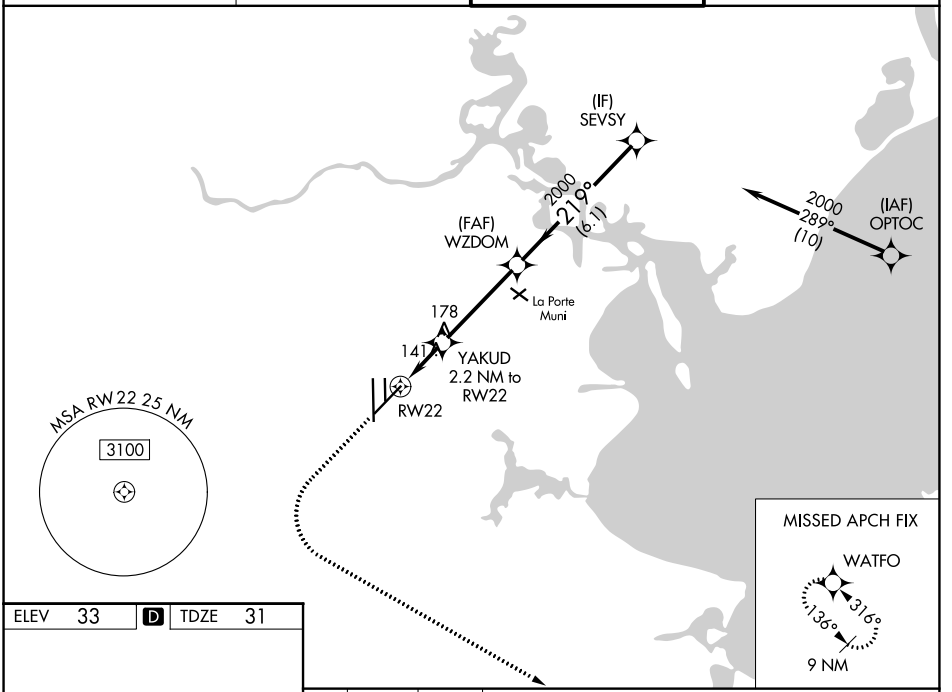

ELEV 33 | D | TDZE 31



HIRL Rwys 4-22 and 17R-35L
TDZL/RCLS Rwys 17R, 22 and 35L

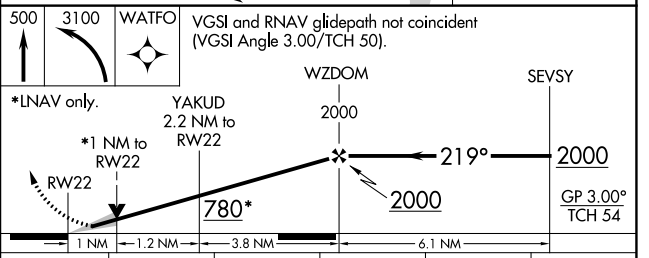

CATEGORY	A	B	C	D	E
LPV DA	231/18 200 (200-½)				
LNAV/VNAV DA	341/24 310 (400-½)				
LNAV MDA	400/24 369 (400-½)		400/35 369 (400-⅝)		
CIRCLING	500-1 467 (500-1)		580-1½ 547 (600-1½)	640-2 607 (700-2)	700-2¼ 667 (700-2¼)

SC-5, 29 OCT 2026 to 26 NOV 2026
SC-5, 29 OCT 2026 to 26 NOV 2026