WAAS	APP CRS	Rwy Ldg 7602
CH 86209	041°	TDZE 44
W04A		Apt Elev 46

RNAV (GPS) RWY 4


WILLIAM P HOBBY (HOU)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C (29°F) or above 54°C (130°F). For inop ALSF-2, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to 1¼ miles and LNAV Cat C/D/E visibility to 1⅜ mile. DME/DME RNP-0.3 NA.

ALSF-2

MISSED APPROACH: Climb to 2000 direct RAYCI and hold.


D-ATIS	HOUSTON APP CON	HOBBY TOWER	GND CON
124.6	120.05 379.1 (E) 124.35 316.15(W)	118.7 256.9	121.9

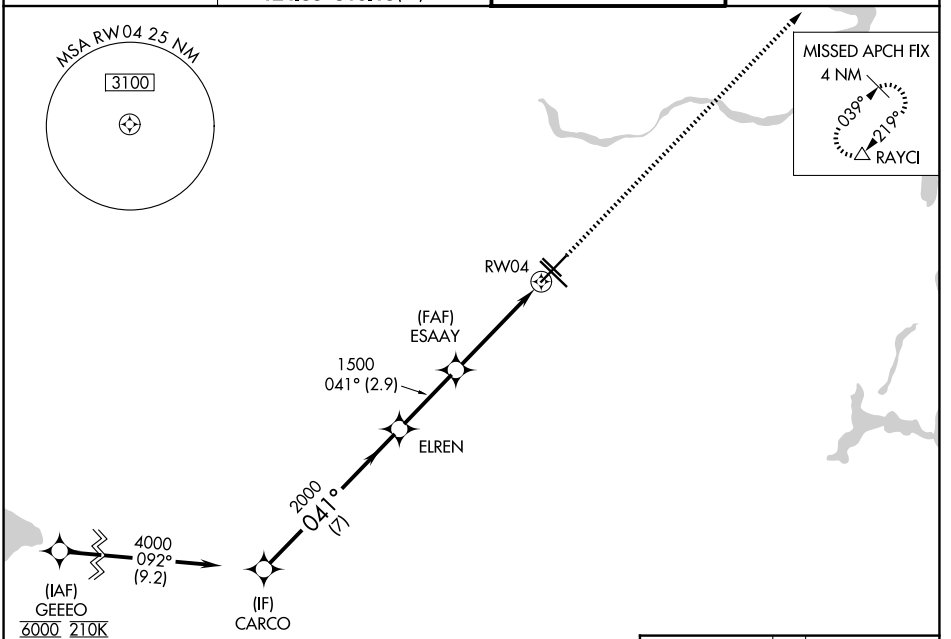

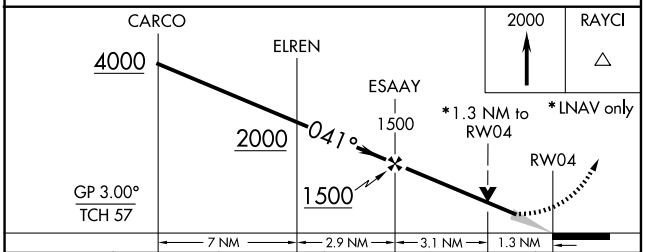

CATEGORY	A	B	C	D	E
LPV DA	244/18 200 (200-½)				
LNAV/VNAV DA	440/45 396 (400-⅞)				
LNAV MDA	520/24 476 (500-½)		520/50 476 (500- 1)		
CIRCLING	520-1 474 (500-1)		740-2¼ 694 (500-2¼)		860-3 814 (900-3)

ELEV 46 D TDZE 44



REIL Rwy 31L
MIRL Rwy 13L-31R
HIRL Rwys 4-22 and 13R-31L
TDZL/RCLS Rwys 4, 13R and 31L

SC-5, 29 OCT 2026 to 26 NOV 2026
SC-5, 29 OCT 2026 to 26 NOV 2026