APP CRS	Rwy Ldg	11200
230°	TDZE	783
	Apt Elev	796

RNAV (RNP) Z RWY 23R


INDIANAPOLIS INTL (IND)


For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS Required. For inoperative ALS, increase RNP 0.15 all Cats visibility to RVR 6000 and increase RNP 0.30 all Cats visibility to 1⅜ SM. Simultaneous approach authorized.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct KEADY and hold.


D-ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL	CPDLC
134.25	128.175 317.8	120.9 251.1	121.9	128.75 251.1	

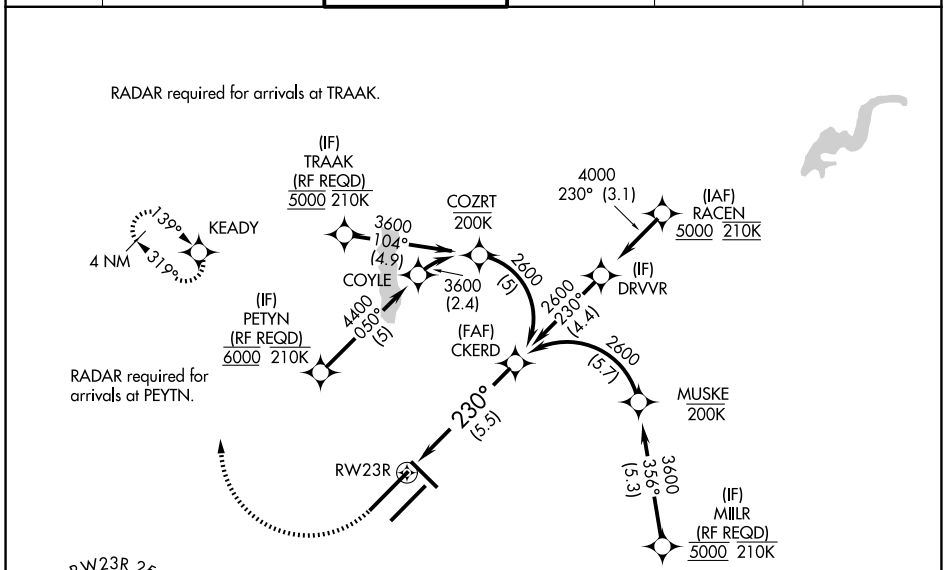




1200	3000	KEADY

See planview for multiple IF locations.

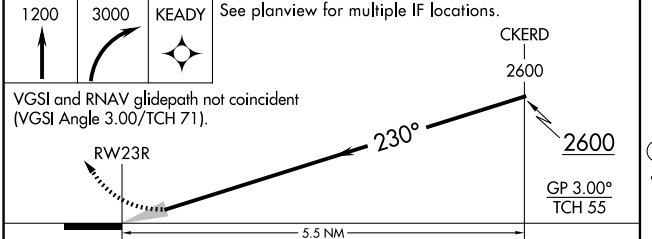

CATEGORY	A	B	C	D
RNP 0.15 DA	1147/40	364 (400-¾)		
RNP 0.30 DA	1206/50	423 (500-1)		

AUTHORIZATION REQUIRED

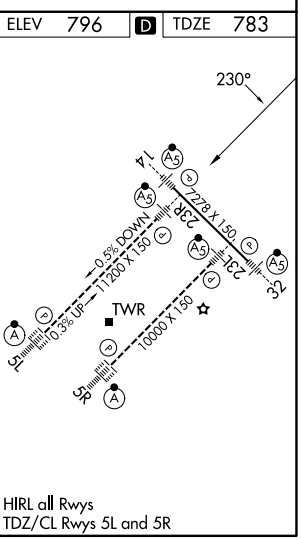

HIRL all Rwys
TDZ/CL Rwys 5L and 5R

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026