RNAV (RNP) Z RWY 32

INDIANAPOLIS INTL (IND)


APP CRS	Rwy Ldg	7278
320°	TDZE	793
	Apt Elev	796

For uncompensated Baro-VNAV systems, procedure NA below -18°C (2°F) or above 54°C (130°F). GPS required.


MALSR

MISSED APPROACH: Climb to 3000 on track 320° to KEADY and hold.


D-ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL	CPDLC
134.25	128.175 317.8	120.9 251.1	121.9	128.75 251.1	

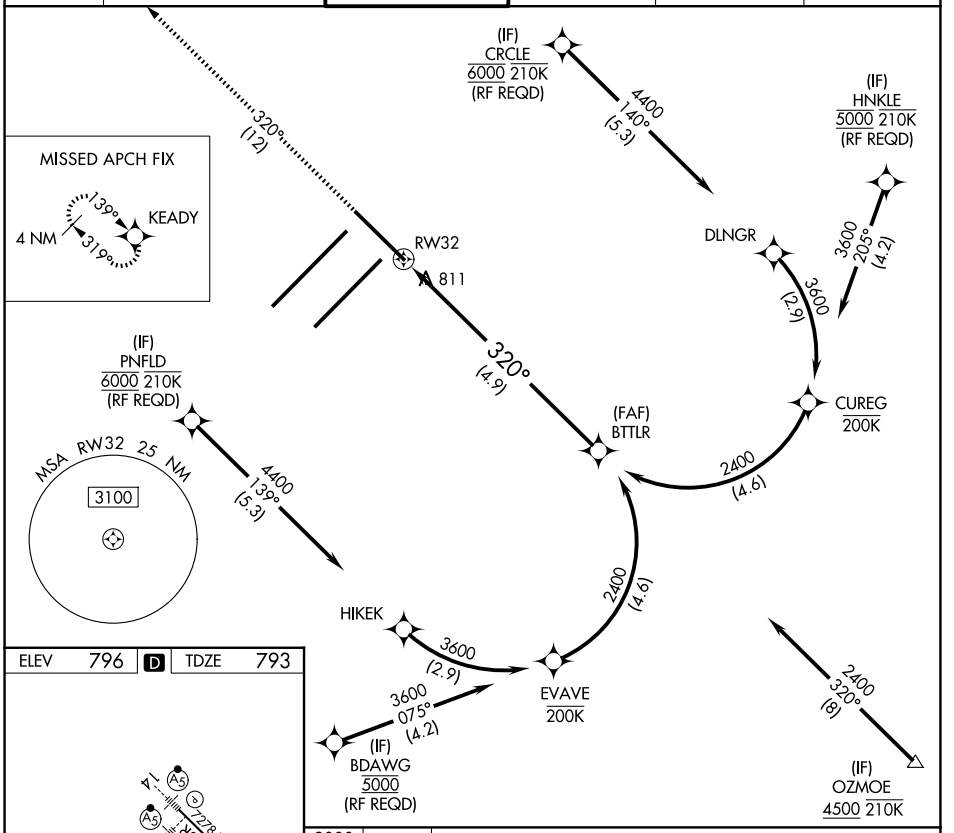

ELEV 796 D TDZE 793



HIRL all Rwys
TDZ/CL Rwys 5L and 5R

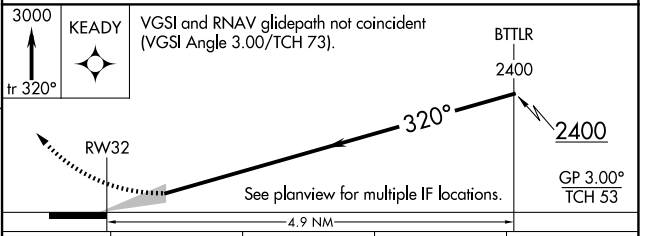

CATEGORY	A	B	C	D
RNP 0.19 DA	1134/30 341 (400-⅝)			
RNP 0.30 DA	1196/45 403 (400-⅞)			

AUTHORIZATION REQUIRED

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026