WAAS CH 50306 W05B	APP CRS 050°	Rwy Ldg 10000 TDZE 791 Apt Elev 796

RNAV (GPS) Y RWY 5R


INDIANAPOLIS INTL (IND)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

ALSF-2


MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct OZMOE and hold.

D-ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL	CPDLC
134.25	128.175 317.8	120.9 251.1	121.9	128.75 251.1	

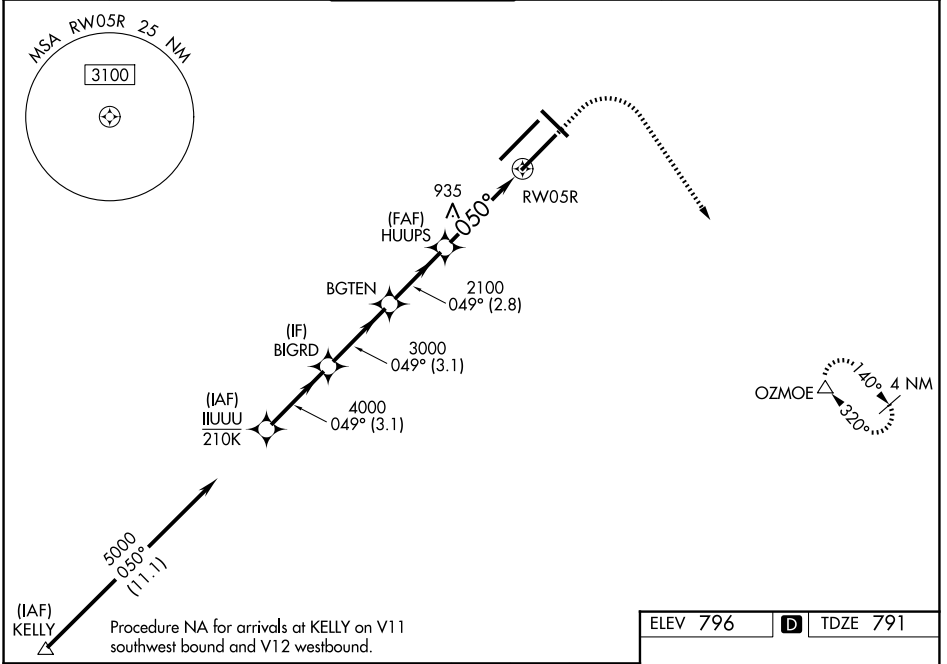

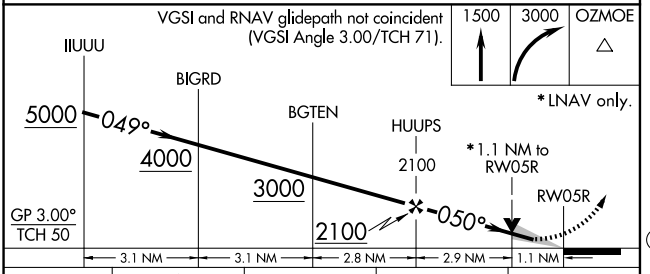

CATEGORY	A	B	C	D
LPV DA	991/18 200 (200-½)			
LNAV/VNAV DA	1172/40 381 (400-¾)			
LNAV MDA	1220/24 429 (500-½)		1220/40 429 (500-¾)	
CIRCLING	1420-1 624 (700-1)		1420-1¾ 624 (700-1¾)	1560-2½ 764 (800-2½)

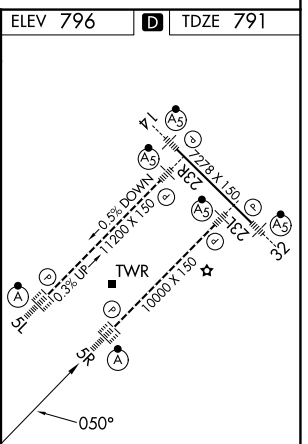

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026