| WAAS CH 50316 W16A | APP CRS 159° | Rwy Ldg 5387<br>TDZE 341<br>Apt Elev 341 |
|---|---|---|

# RNAV (GPS) RWY 16


## HAWKINS FLD (HKS)

T A Baro-VNAV NA when using Jackson-Medgar Wiley Evers Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Jackson-Medgar Wiley Evers Intl altimeter setting and increase all DA 19 feet and all MDA 20 feet. Increase LNAV/VNAV all Cats and LNAV Cats C/D visibilities ⅛ mile and Circling Cat C ¼ mile. For inop MALSR when using Jackson-Medgar Wiley Evers Intl altimeter setting increase LNAV/VNAV all Cats to 1⅛.

MALS

MISSED APPROACH: Climb to 2000 direct JILHO and hold.

| ASOS | JACKSON APP CON ★ | HAWKINS TOWER ★ | GND CON | CLNC DEL | UNICOM |
|---|---|---|---|---|---|
| 120.625 | 123.9 319.2 | 119.65 (CTAF) L 257.8 | 121.9 239.0 | 121.9 (When twr closed) | 122.95 |

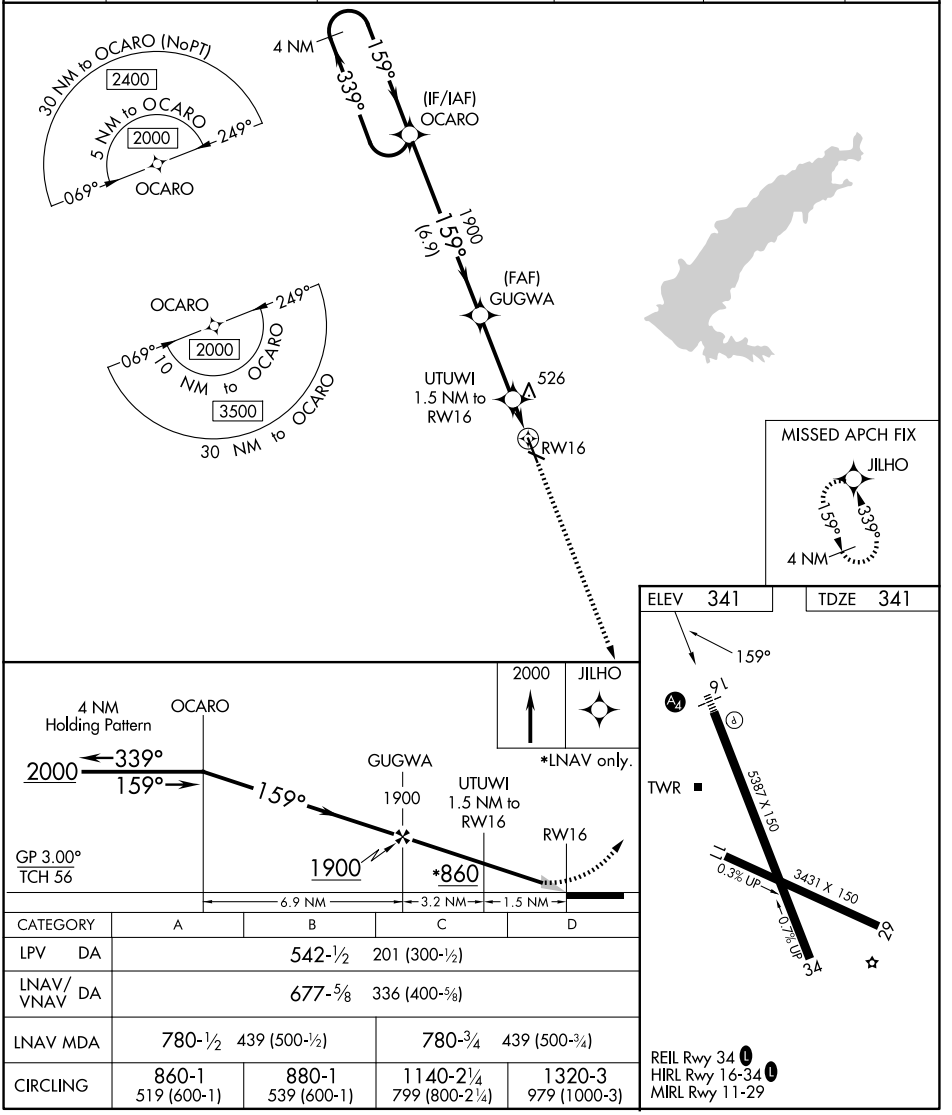


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 542-½ 201 (300-½) | | | |
| LNAV/VNAV DA | 677-⅝ 336 (400-⅝) | | | |
| LNAV MDA | 780-½ 439 (500-½) | | 780-¾ 439 (500-¾) | |
| CIRCLING | 860-1 519 (600-1) | 880-1 539 (600-1) | 1140-2¼ 799 (800-2¼) | 1320-3 979 (1000-3) |



SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026