RNAV (GPS) RWY 25

HERLONG RECREATIONAL (HEG)


WAAS	APP CRS	Rwy Ldg	4001
CH 63026	251°	TDZE	86
W25A		Apt Elev	86

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 25 helicopter visibility reduction below ¾ SM NA. Circling Rwy 11, 29 NA at night. Baro-VNAV and VDP NA when using VQQ altimeter setting. When local altimeter setting not received, use VQQ altimeter setting and increase LPV DA to 394 feet; increase LNAV/VNAV DA to 616 feet and all visibilities ⅛ SM; increase all MDAs 20 feet and LNAV visibility Cat C/D ⅛ SM.

MISSED APPROACH: Climb to 2000 direct WODKU and on track 304° to REDIE and hold.


AWOS-3	JACKSONVILLE APP CON	GCO	UNICOM
119.275	127.775 377.075	121.725	123.0 (CTAF) L

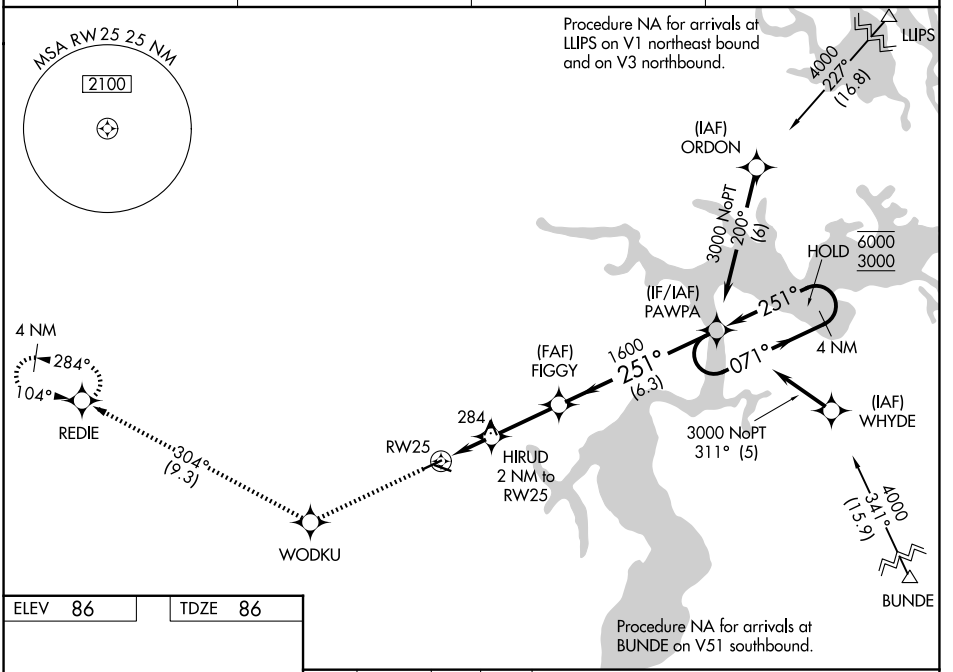

ELEV 86 TDZE 86



MIRL Rwys 7-25 and 11-29 L

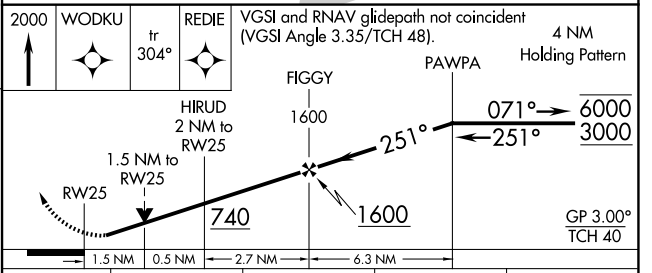

CATEGORY	A	B	C	D
LPV DA	378-1 292 (300-1)			
LNAV/VNAV DA	600-1⅜ 514 (600-1⅜)			
LNAV MDA	600-1 514 (600-1)		600-1⅜ 514 (600-1⅜)	
CIRCLING	600-1 514 (600-1)		980-2¾ 894 (900-2¾)	980-3 894 (900-3)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026