LOC/DME I-MKC	APP CRS	Rwy Ldg	6526
109.9	192°	TDZE	754
Chan 36		Apt Elev	757

ILS or LOC RWY 19

KANSAS CITY DOWNTOWN/WHEELER FLD (MKC)


DME or RADAR required for LOC only. DME or RADAR required for procedure entry.

Circling NA east of Rwy 1-19. Circling NA to Rwy 22. For inop ALS, increase S-LOC 19 Cat C/D visibility to 2 SM. Circling NA for Cat D to Rwy 4. Rwy 19 helicopter visibility reduction below RVR 4000 NA. S-ILS 19 inop table does not apply.


MALSF

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct TOP VORTAC and hold.

ATIS	KANSAS CITY APP CON	DOWNTOWN TOWER	GND CON
120.75	118.4 307.35	133.3 233.7	121.9

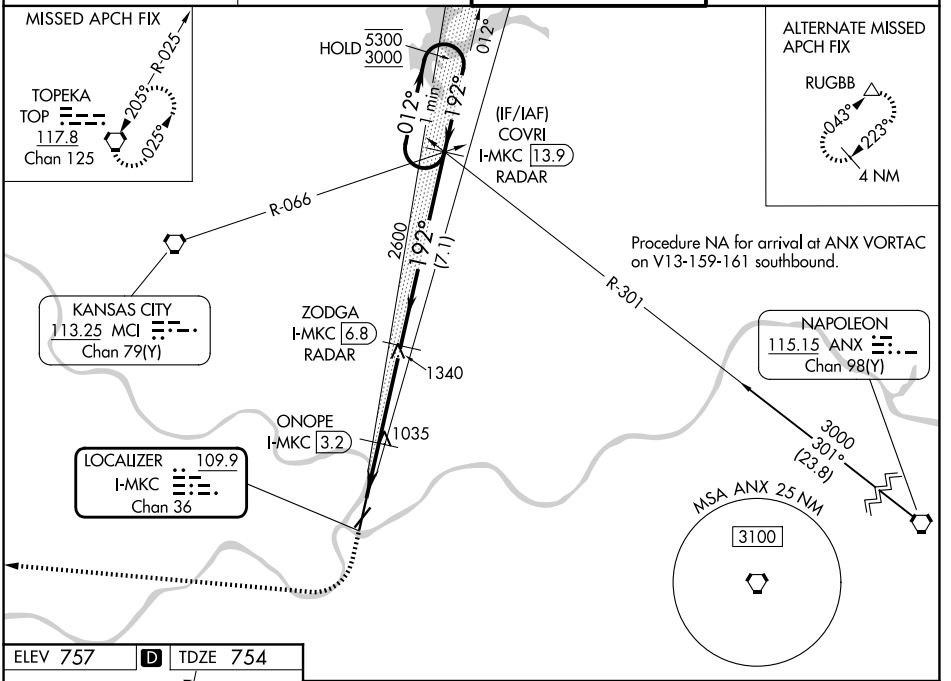


ELEV 757 D TDZE 754

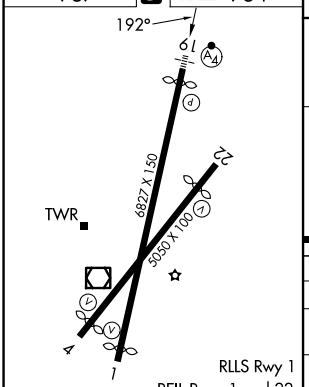

FAF to MAP 5.7 NM

Knots	60	90	120	150	180
Min:Sec	5:42	3:48	2:51	2:17	1:54

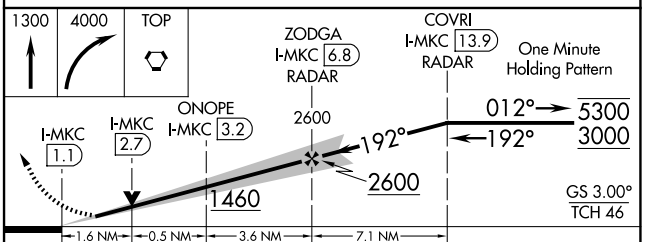

CATEGORY	A	B	C	D
S-ILS 19	1004/40 250 (300-¾)			
S-LOC 19	1460/40 706 (800-¾)	1460/55 706 (800-1)	1460-1⅞ 706 (800-1⅞)	
CIRCLING	1460-1 703 (800-1)		1460-2 703 (800-2)	1540-2½ 783 (800-2½)
	ONOPE FIX MINIMUMS			
S-LOC 19	1300/40 546 (600-¾)		1300-1⅜ 546 (600-1⅜)	
CIRCLING	1380-1 623 (700-1)	1400-1 643 (700-1)	1460-2 703 (800-2)	1540-2½ 783 (800-2½)

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026