RNAV (GPS) Z RWY 19

KANSAS CITY DOWNTOWN/WHEELER FLD (MKC)

WAAS	APP CRS	Rwy Ldg	6526
CH 90320	192°	TDZE	754
W19A		Apt Elev	757


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 19 helicopter visibility reduction below RVR 4000 NA. For inop ALS, increase LPV * visibility all Cats to RVR 4500, and LPV visibility all Cats to RVR 5500.

MALSF

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 direct MIFEV and on track 236° to YETUK and hold.
*Missed approach requires minimum climb of 300 feet per NM to 1500.
#Missed approach requires minimum climb of 360 feet per NM to 2400.

ATIS	KANSAS CITY APP CON	DOWNTOWN TOWER	GND CON
120.75	118.4 307.35	133.3 233.7	121.9

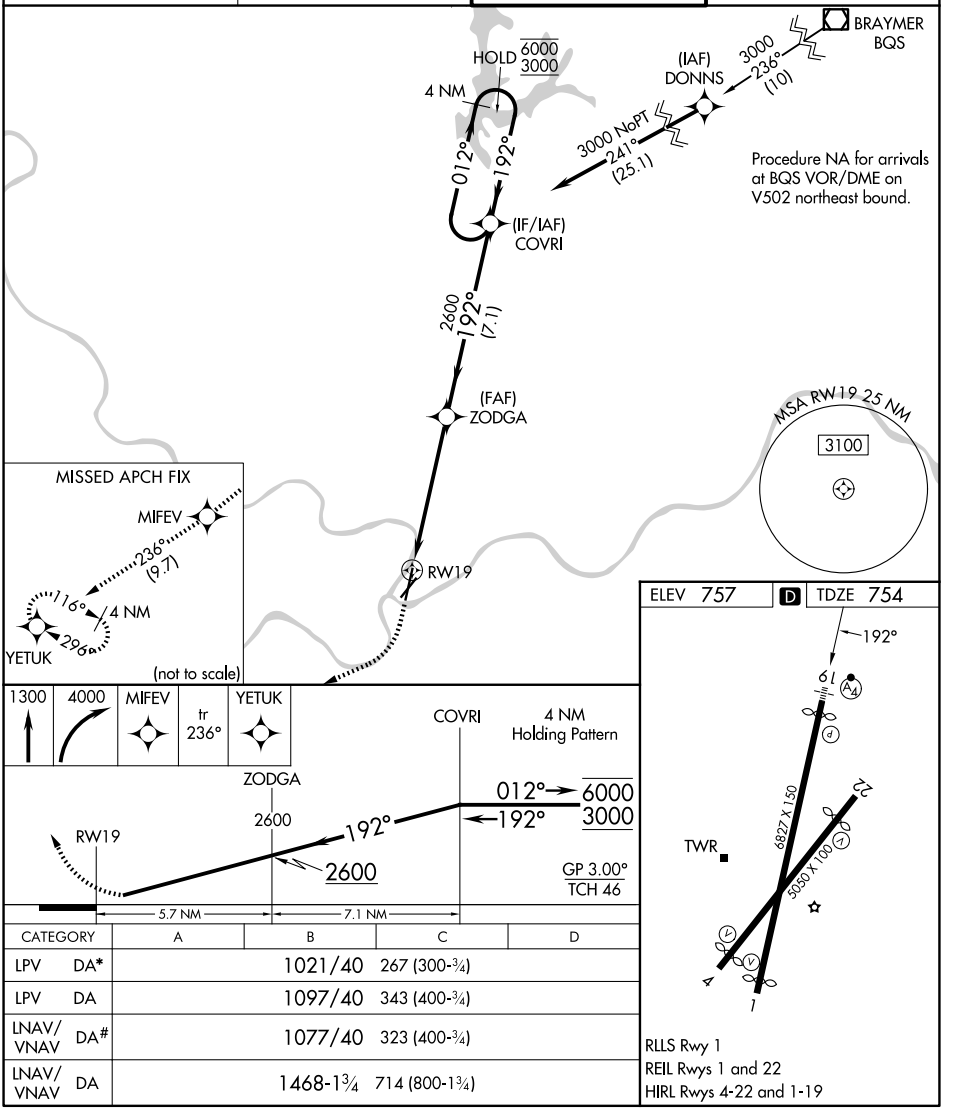

CATEGORY	A	B	C	D
LPV DA*	1021/40	267 (300-¾)		
LPV DA	1097/40	343 (400-¾)		
LNAV/VNAV DA#	1077/40	323 (400-¾)		
LNAV/VNAV DA	1468-1¾	714 (800-1¾)		

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026