
TOP ALTITUDE: 10000

RADAR and DME required.

KANSAS CITY DEP CON
118.4 307.35
ATIS
120.75
CLNC DEL
121.9

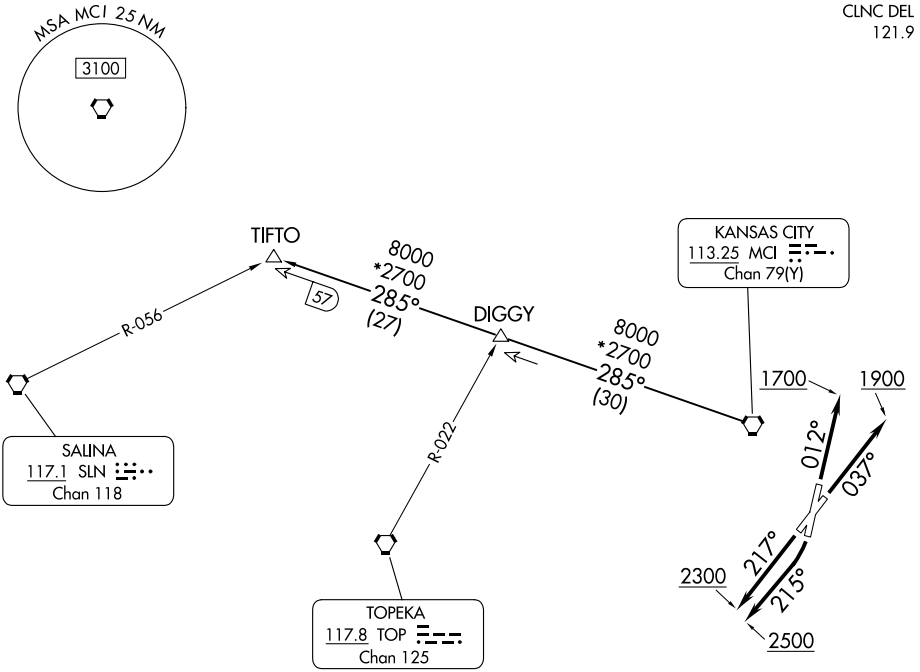

TAKEOFF MINIMUMS
Rwy 1: 300-1⅞ or standard with minimum climb of 201′ per NM to 1000.
Rwy 4: Standard.
Rwy 19: Standard with minimum climb of 465′/NM to 2500.
Rwy 22: 300-1⅝ or standard with minimum climb of 260′/NM to 1000.

NOTE: Chart not to scale

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 1: Climb on heading 012° to 1700, thence. . . .
TAKEOFF RUNWAY 4: Climb on heading 037° to 1900, thence. . . .
TAKEOFF RUNWAY 19: Climbing right turn heading 215° to 2500, thence. . . .
TAKEOFF RUNWAY 22: Climb on heading 217° to 2300, thence. . . .

. . . .climb on assigned heading for RADAR vectors to appropriate route. Maintain 10000, expect filed altitude 10 minutes after departure.

TIFTO TRANSITION (TIFTO8.TIFTO): From over MCI VORTAC on MCI R-285 to TIFTO.

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026