RNAV (GPS) RWY 36

LA CROSSE RGNL (LSE)


WAAS	APP CRS	Rwy Ldg	7433
CH 86509	360°	TDZE	653
W36A		Apt Elev	656


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27° C or above 54° C. When local altimeter setting not received, use ONA altimeter setting: increase LPV DA to 1007 feet; increase LNAV/VNAV DA to 1257 feet; increase all MDAs 60 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ⅛ SM, and Circling visibility Cat B ¼ SM. Circling to Rwy 22 NA at night. Baro-VNAV and VDP NA when using ONA altimeter setting. -21°C

MISSED APPROACH: Climb to 3500 direct POGOC and hold.

ATIS	MINNEAPOLIS CENTER	LA CROSSE TOWER ★	GND CON	UNICOM
124.95	128.6 363.0	118.45 (CTAF) L 251.075	121.8	122.95

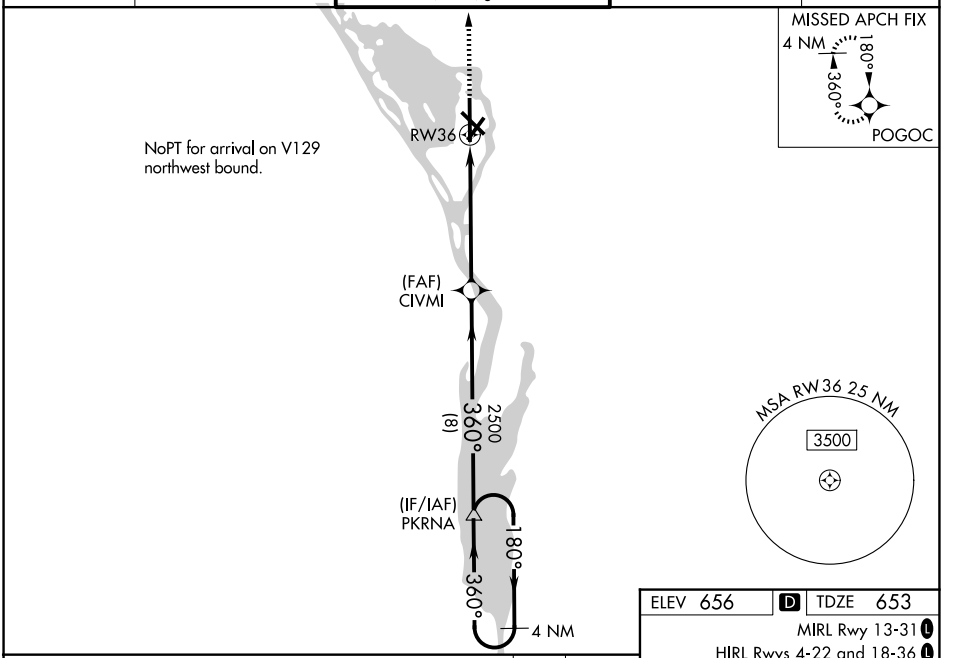

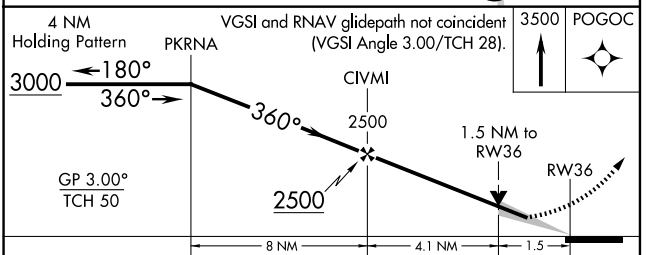


CATEGORY	A	B	C	D
LPV DA	953-1 300 (300-1)			
LNAV/VNAV DA	1203-2 550 (600-2)			
LNAV MDA	1140-1 487 (500-1)		1140-1⅛ 487 (500-1⅛)	1140-1½ 487 (500-1½)
CIRCLING	1140-1 484 (500-1)	1460-1 804 (900-1)	1760-3 1104 (1200-3)	1820-3 1164 (1200-3)

ELEV 656 D TDZE 653

MIRL Rwy 13-31 L

HIRL Rwys 4-22 and 18-36 L

REIL Rwys 13, 31 and 36 L

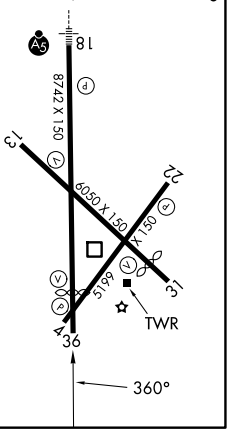

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026