WAAS CH 65601 W09A	APP CRS 094°	Rwy Ldg 6000 / TDZE 33 / Apt Elev 33

RNAV (GPS) RWY 9L


MELBOURNE ORLANDO INTL (MLB)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. Rwy 9L helicopter visibility reduction below ¾ SM NA.


MISSED APPROACH: Climb to 2000 direct LIQNI and hold.

ATIS	ORLANDO APP CON	MELBOURNE TOWER ★	GND CON	UNICOM
132.55	126.025 281.425	118.2 (CTAF) L 257.8	121.9	122.95

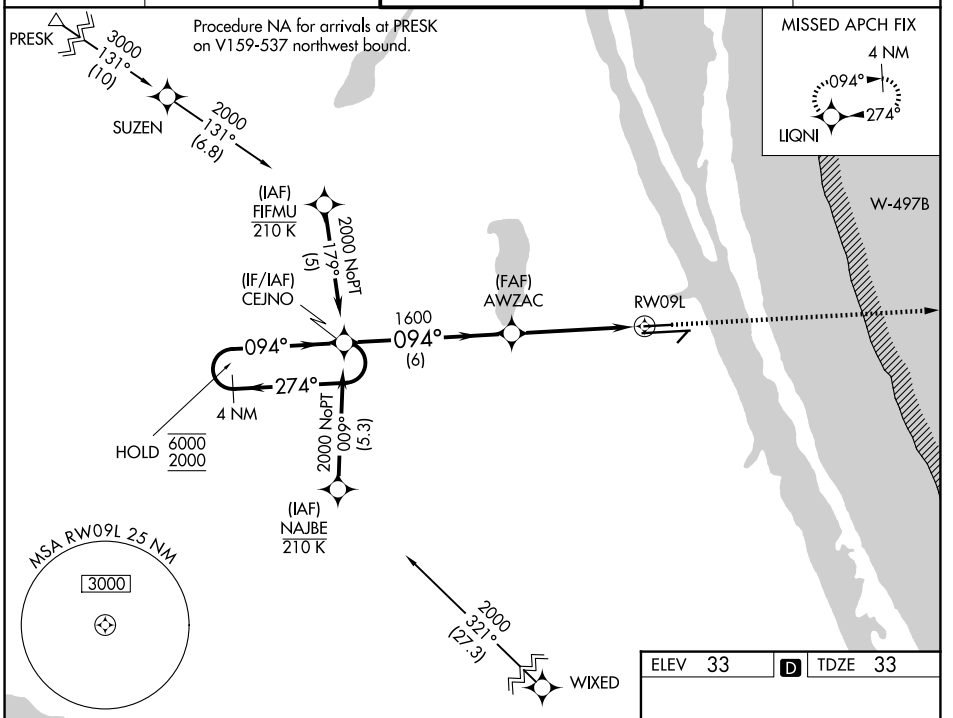

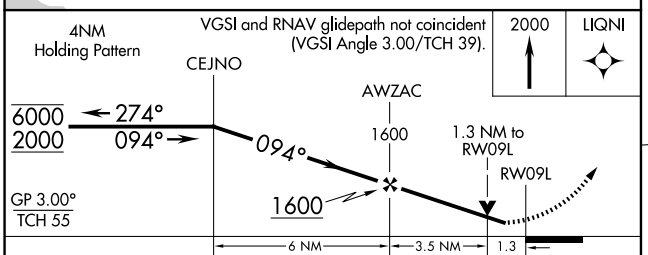

CATEGORY	A	B	C	D
LPV DA	283-¾	250 (300-¾)		
LNAV/VNAV DA	473-1¼	440 (500-1¼)		
LNAV MDA	480-1	447 (500-1)	480-1⅜	447 (500-1⅜)
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680-1¾ 647 (700-1¾)	880-2¾ 847 (900-2¾)



REIL Rwy 27L L
HIRL Rwy 9R-27L L
MIRL Rwys 5-23 and 9L-27R L
TDZ/CL Rwy 9R

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026