FLMGO TWO DEPARTURE(RNAV) Departure Routes

See following page for transition routes.

FLMGO

TOP ALTITUDE: 5000

MIAMI DEP CON
126.85 290.325
D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
121.8 348.6 (8L/R, 12, 26L/R)
127.5 348.6 (9, 27, 30)
MIAMI TOWER
118.3 256.9

349° (27)

ALNZO
5000

339° (17)

GEITH

353° (32)

323° (19)

LIIVV

348° (6)

DEALZ

007° (5)

520

092°

092°

082°

CSALT

078°

124°

272°

092°

520

272°

304°

282°

WADLE

352° (6)

007° (7)

RMIRO

RUSSS

315° (4)

283°

272°

298°

272°

KROCS

MSA MIA 25 NM
2900

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.
NOTE: WAPOM Transition ATC assigned except aircraft landing: MCO, DAB, and MLB terminal areas.

TAKEOFF MINIMUMS
Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215' to 1400.
Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235' to 1400.
Rwy 9: Standard with minimum climb of 500'/NM to 520, then minimum climb of 240' to 1400.
Rwy 12: Standard wtih minimum climb of 500'/NM to 520, then minimum climb of 230' to 1400.
Rwys 26L/R, 27, 30: Standard with minimum climb of 500'/NM to 520.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)


SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026

MIAMI DEP CON
126.85 290.325
D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
121.8 348.6 (8L/R, 12, 26L/R)
127.5 348.6 (9, 27, 30)
MIAMI TOWER
118.3 256.9

TAKEOFF MINIMUMS
Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215' to 1400.
Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235' to 1400.
Rwy 9: Standard with minimum climb of 500'/NM to 520, then minimum climb of 240' to 1400.
Rwy 12: Standard wtih minimum climb of 500'/NM to 520, then minimum climb of 230' to 1400.
Rwys 26L/R, 27, 30: Standard with minimum climb of 500'/NM to 520.

TOP ALTITUDE: 5000

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

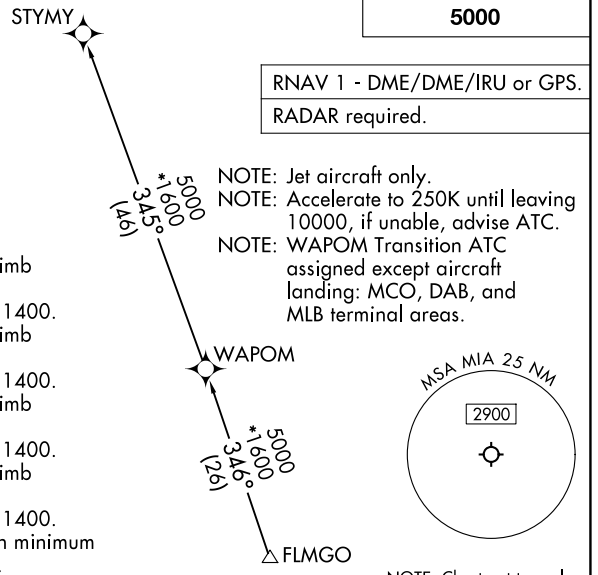

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.
NOTE: WAPOM Transition ATC assigned except aircraft landing: MCO, DAB, and MLB terminal areas.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

SEE ADDITIONAL REQUIREMENTS ON AAUP

TAKEOFF RUNWAYS 8L/8R: Climb on heading 092° to 520, then direct CSALT, then on track 007° to DEALZ, then on track 348° to LIIVV, then on track 323° to GEITH, then on track 339° to cross ALNZO at or above 5000, thence. . . .
TAKEOFF RUNWAY 9: Climb on heading 092° to intercept course 082° to CSALT, then on track 007° to DEALZ, then on track 348° to LIIVV, then on track 323° to GEITH, then on track 339° to cross ALNZO at or above 5000, thence. . . .
TAKEOFF RUNWAY 12: Climb on heading 124° to intercept course 078° to CSALT, then on track 007° to DEALZ, then on track 348° to LIIVV, then on track 323° to GEITH, then on track 339° to cross ALNZO at or above 5000, thence. . . .
TAKEOFF RUNWAY 26L: Climb on heading 272° to intercept course 283° to KROCS, then on track 315° to RUSSS, then on track 007° to RMIRO, then on track 353° to cross ALNZO at or above 5000, thence. . . .
TAKEOFF RUNWAY 26R: Climb on heading 272° to intercept course 282° to KROCS, then on track 315° to RUSSS, then on track 007° to RMIRO, then on track 353° to cross ALNZO at or above 5000, thence. . . .
TAKEOFF RUNWAY 27: Climb on heading 272° to intercept course 298° to KROCS, then on track 315° to RUSSS, then on track 007° to RMIRO, then on track 353° to cross ALNZO at or above 5000, thence. . . .
TAKEOFF RUNWAY 30: Climb on heading 304° to 520, then direct WADLE, then on track 352° to RMIRO, then on track 353° to cross ALNZO at or above 5000, thence. . . .

. . . .on track 349° to FLMGO, then on assigned transition. Maintain 5000. Expect filed altitude within 10 minutes after departure.

STYMY TRANSITION (FLMGO2.STYMY)
WAPOM TRANSITION (FLMGO2.WAPOM)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026