HURCN FOUR DEPARTURE (RNAV) Departure Routes

(HURCN4.HURCN) 21MAR24

MIAMI, FLORIDA
MIAMI INTL (MIA)

(HURCN4.HURCN) 25331
HURCN FOUR DEPARTURE (RNAV) Departure Routes
MIAMI INTL (MIA)
MIAMI, FLORIDA

AL-257 (FAA)

RNAV-1 DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE: 5000

MIAMI DEP CON
126.85 290.325
D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
(8L/R, 12, 26L/R)
121.8 348.6
(9, 27, 30)
127.5 348.6
MIAMI TOWER
118.3 256.9

See following page for transition routes.

HURCN

318° (9)

JOENZ
5000

342° (18)

NIBLT

297° (23)

340° (19)

335° (19)

LIIVV

348° (6)

DEALZ

007° (5)

WADLE

520

304° 272°

RUSSS

315° (4)

282° 092°

283° 092°

KROCS

298° 272°

272°

520

092°

092° 082°

CSALT

124° 078°

N

MSA MIA 25 NM
2900

TAKEOFF MINIMUMS
Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215' to 1400.
Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235' to 1400.
Rwy 9: Standard with minimum climb of 500'/NM to 520, then minimum climb of 240' to 1400.
Rwy 12: Standard with minimum climb of 500'/NM to 520, then minimum climb of 230' to 1400.
Rwys 26L/R, 27, 30: Standard with minimum climb of 500'/NM to 520.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

(CONTINUED ON FOLLOWING PAGE)


NOTE: Chart not to scale.

HURCN FOUR DEPARTURE (RNAV) Transition Routes

TOP ALTITUDE: 5000

RNAV-1 DME/DME/IRU or GPS.
RADAR required.

MIAMI DEP CON
126.85 290.325
D-ATIS
133.675
CLNC DEL
135.35
CPDLC
GND CON
121.8 348.6 (8L/R, 12, 26L/R)
127.5 348.6 (9, 27, 30)
MIAMI TOWER
118.3 256.9

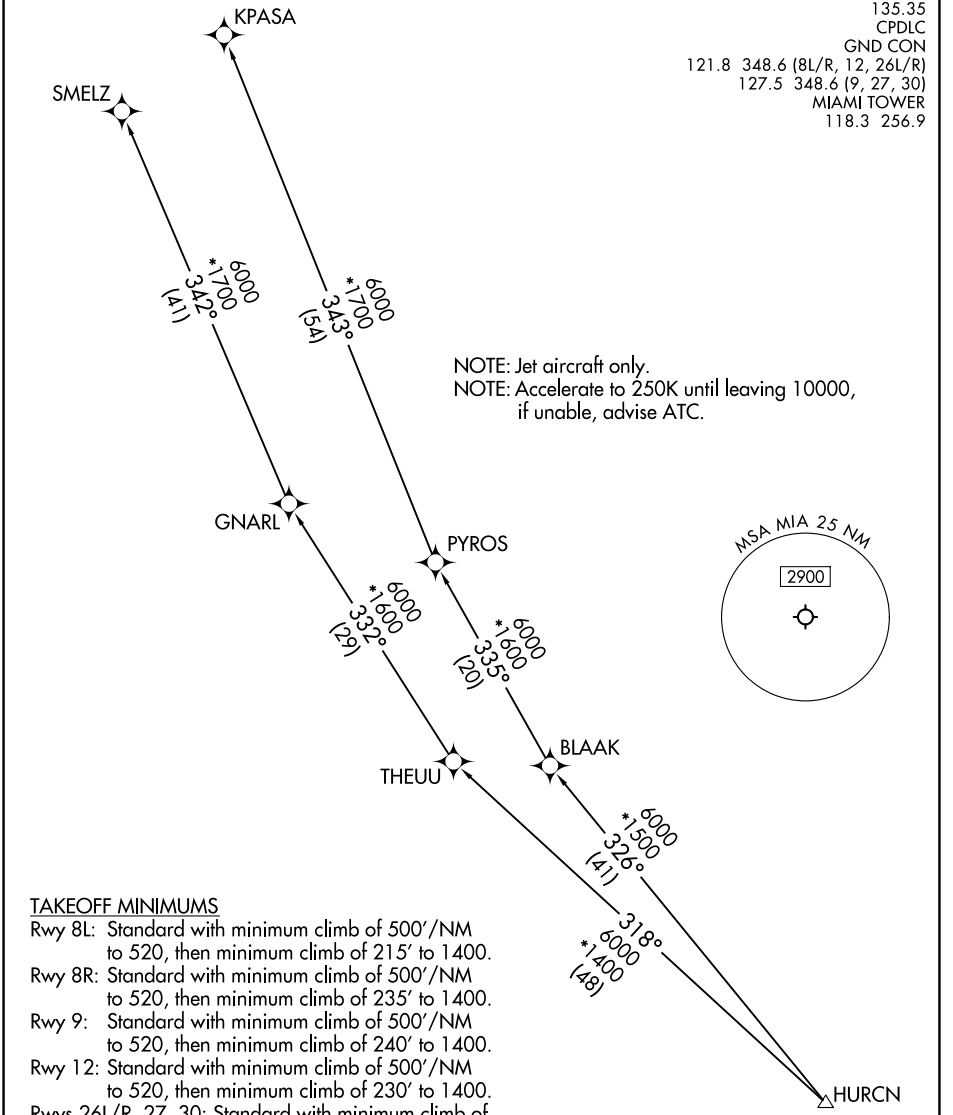

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving 10000, if unable, advise ATC.

TAKEOFF MINIMUMS
Rwy 8L: Standard with minimum climb of 500'/NM to 520, then minimum climb of 215' to 1400.
Rwy 8R: Standard with minimum climb of 500'/NM to 520, then minimum climb of 235' to 1400.
Rwy 9: Standard with minimum climb of 500'/NM to 520, then minimum climb of 240' to 1400.
Rwy 12: Standard with minimum climb of 500'/NM to 520, then minimum climb of 230' to 1400.
Rwys 26L/R, 27, 30: Standard with minimum climb of 500'/NM to 520.

(CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026

DEPARTURE ROUTE DESCRIPTION

SEE ADDITIONAL REQUIREMENTS ON AAUP

TAKEOFF RUNWAYS 8L/R: Climb on heading 092° to 520, then direct CSALT, then on track 007° to DEALZ, then on track 348° to LIIVV, then on track 297° to NIBLT, then on track 342° to cross JOENZ at or above 5000, thence. . .
TAKEOFF RUNWAY 9: Climb on heading 092° to intercept course 082° to CSALT, then on track 007° to DEALZ, then on track 348° to LIIVV, then on track 297° to NIBLT, then on track 342° to cross JOENZ at or above 5000, thence. . .
TAKEOFF RUNWAY 12: Climb on heading 124° to intercept course 078° to CSALT, then on track 007° to DEALZ, then on track 348° to LIIV, then on track 297° to NIBLT, then on track 342° to cross JOENZ at or above 5000, thence. . .
TAKEOFF RUNWAY 26L: Climb on heading 272° to intercept course 283° to KROCS, then on track 315° to RUSSS, then on track 340° to NIBLT, then on track 342° to cross JOENZ at or above 5000, thence. . .
TAKEOFF RUNWAY 26R: Climb on heading 272° to intercept course 282° to KROCS, then on track 315° to RUSSS, then on track 340° to NIBLT, then on track 342° to cross JOENZ at or above 5000, thence. . .
TAKEOFF RUNWAY 27: Climb on heading 272° to intercept course 298° to KROCS, then on track 315° to RUSSS, then on track 340° to NIBLT, then on track 342° to cross JOENZ at or above 5000, thence. . .
TAKEOFF RUNWAY 30: Climb on heading 304° to 520, then direct WADLE, then on track 335° to NIBLT, then on track 342° to cross JOENZ at or above 5000, thence. . .

. . .on track 318° to HURCN, then on transition, maintain 5000. Expect clearance to filed altitude within 10 minutes after departure.

KPASA TRANSITION (HURCN4.KPASA)
SMELZ TRANSITION (HURCN4.SMELZ)

SE-3, 29 OCT 2026 to 26 NOV 2026