RNAV (RNP) Y RWY 8R

MIAMI INTL (MIA)

APP CRS	Rwy Ldg	10506
092°	TDZE	9
	Apt Elev	9


RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below 9°C or above 54°C. Simultaneous approch authorized. For inop ALS, increase RNP 0.11* all Cats visibility to RVR 6000.

MALSR


MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct BRBRA and hold. *Missed approach requires minimum climb of 330 feet per NM to 600.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	
119.15	124.85 322.3	118.3 256.9	121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30)	348.6

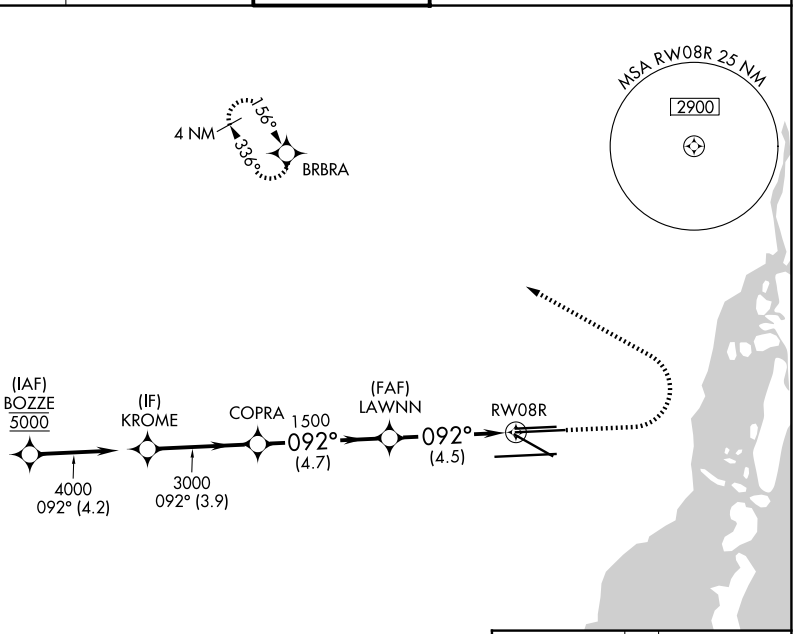

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).


800 3000 BRBRA

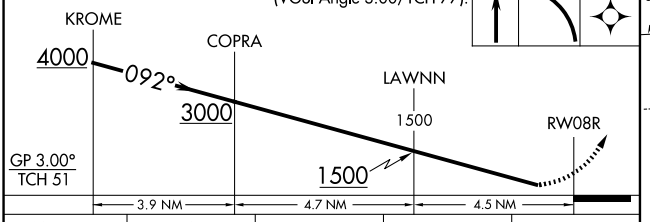

CATEGORY	A	B	C	D
RNP 0.11 DA*	397/40	388 (400-¾)		
RNP 0.30 DA	458/45	449 (500-⅞)		

AUTHORIZATION REQUIRED

ELEV 9 D TDZE 9



TDZL/RCLS Rwy 8R
REIL Rwys 8L and 26R
HIRL all Rwys

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026