RNAV (GPS) Z RWY 8L

MIAMI INTL (MIA)


WAAS	APP CRS		
CH **42703**	**092°**	Rwy Ldg	**8600**
W08A		TDZE	**9**
		Apt Elev	**9**

RNP APCH - GPS.

T Rwy 8L helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.


MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct BRBRA and hold.


D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON	
119.15	**124.85 322.3**	**118.3 256.9**	**121.8** (8L/8R/12/26L/26R) **127.5** (9/27/30)	**348.6**

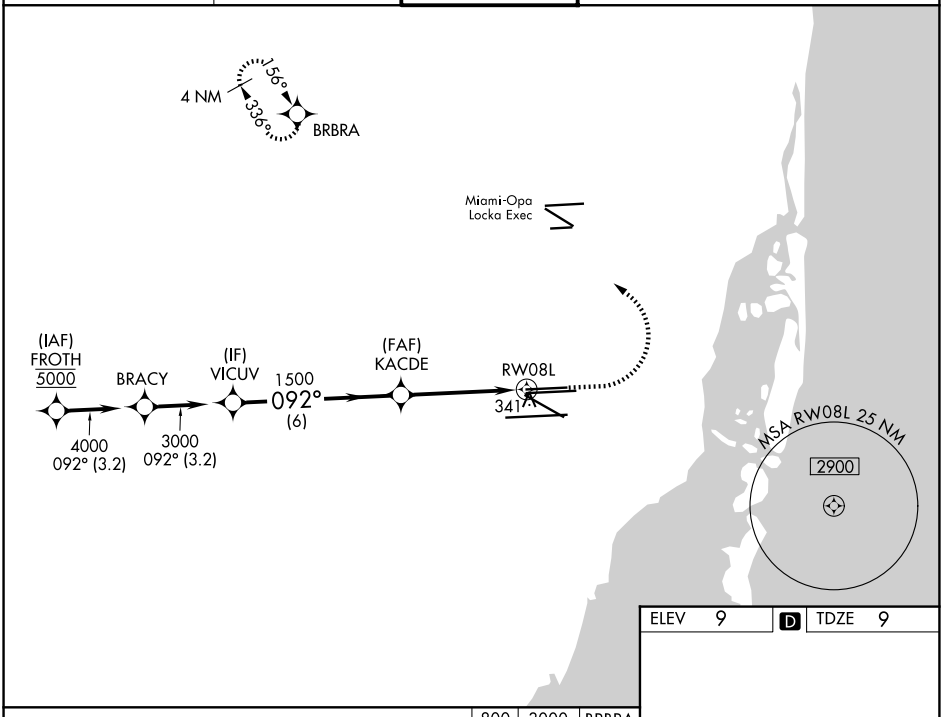

ELEV 9 | D | TDZE 9

800 | 3000 | BRBRA

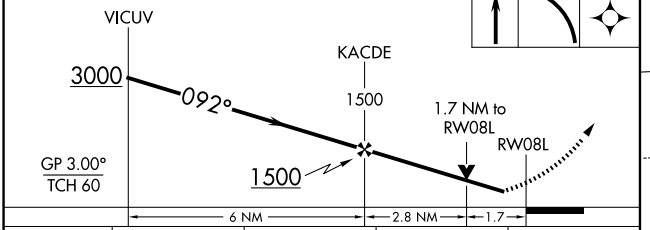



CATEGORY	A	B	C	D
LPV DA	279-7/8	270 (300-7/8)		
LNAV/VNAV DA	513-1 3/8	504 (600-1 3/8)		
LNAV MDA	600-1	591 (600-1)	600-1 3/4	591 (600-1 3/4)

TDZL/RCLS Rwy 8R
REIL Rwys 8L and 26R
HIRL all Rwys

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026