RNAV (GPS) Z RWY 8R

MIAMI INTL (MIA)

WAAS	APP CRS	Rwy Ldg	10506
CH **97404**	**092°**	TDZE	9
W08B		Apt Elev	9


RNP APCH - GPS.


T Rwy 8R helicopter visibility reduction below RVR 4000 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 9°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase LPV all Cats visibility to RVR 4500 and LNAV Cats A and B visibility to RVR 5500.

MALSR (A5)


MISSED APPROACH: Climb to 800 then climbing left turn to 3000 direct BRBRA and hold.

D-ATIS	MIAMI APP CON	MIAMI TOWER	GND CON
119.15	**124.85 322.3**	**118.3 256.9**	**121.8** (8L/8R/12/26L/26R) **127.5** (9/27/30) **348.6**

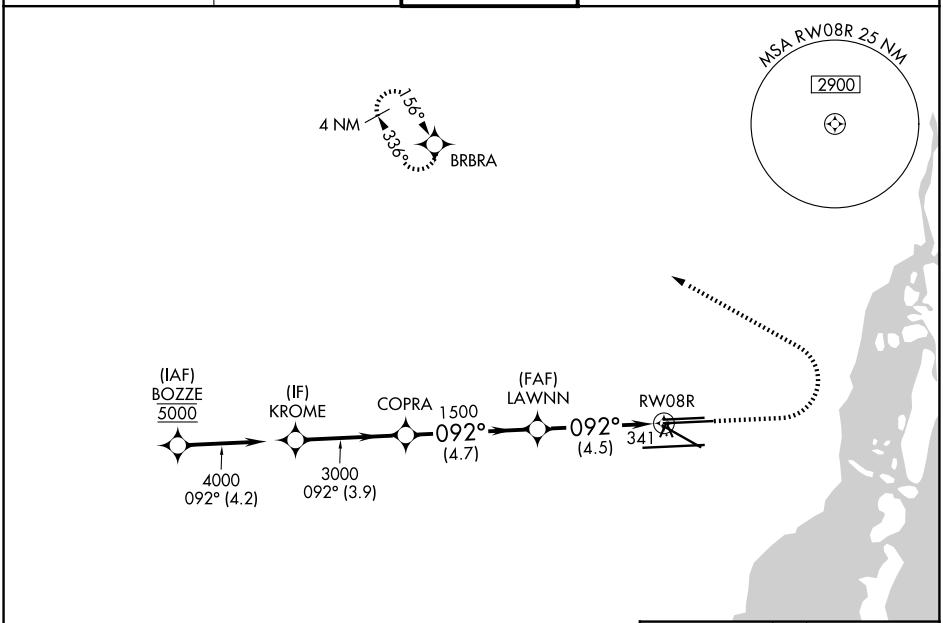

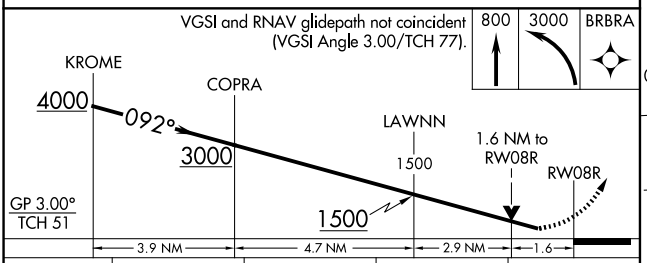

CATEGORY	A	B	C	D
LPV DA	277/40 268 (300-¾)			
LNAV/VNAV DA	531/55 522 (600-1)			
LNAV MDA	600/40 591 (600-¾)		600-1¼ 591 (600-1¼)	

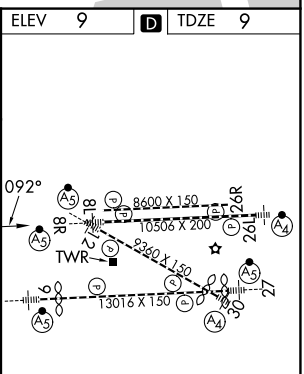

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026