LOC/DME I-PXY	APP CRS	Rwy Ldg 7867
111.5	256°	TDZE 683
Chan 52		Apt Elev 729

LOC RWY 25L


GENERAL MITCHELL INTL (MKE)


RADAR required for procedure entry. DME or RADAR required.


Rwy 25L helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 2800 then right turn direct BAE VOR/DME and hold.

D-ATIS	MILWAUKEE APP CON	MILWAUKEE TOWER	GND CON
126.4	126.5 307.0	124.575 269.05	121.8 263.125

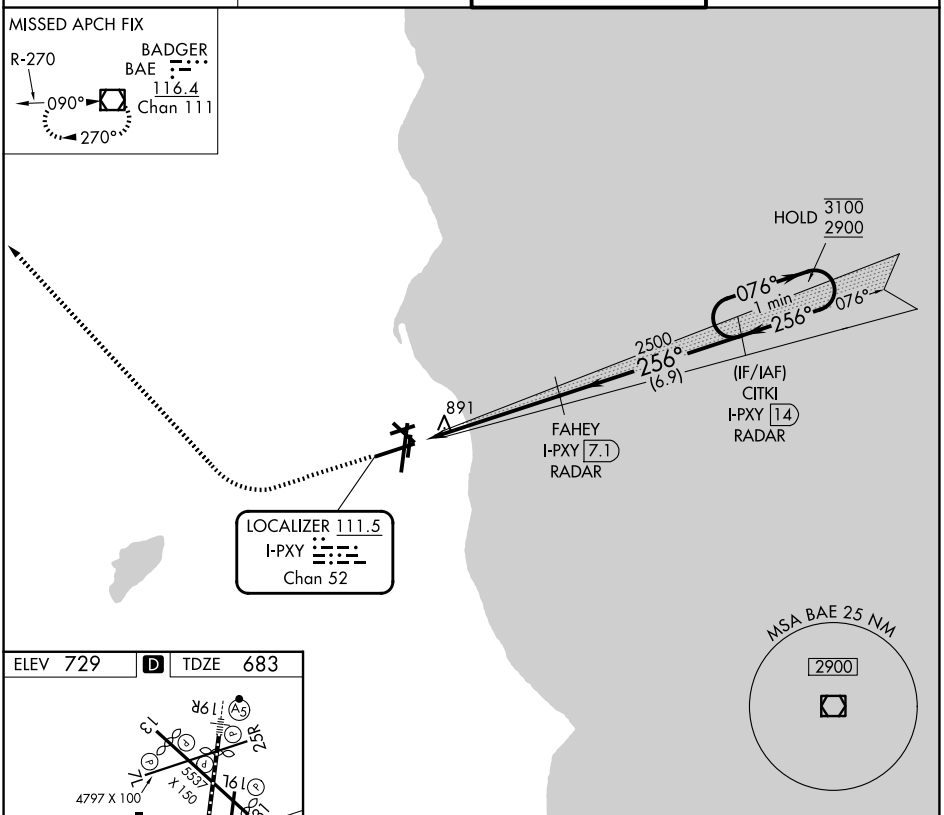

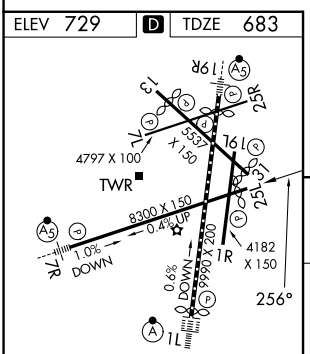

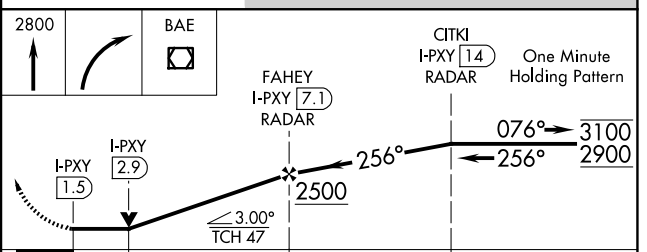

FAF to MAP 5.6 NM					
Knots	60	90	120	150	180
Min:Sec	5:36	3:44	2:48	2:14	1:52

CATEGORY	A	B	C	D
S-LOC 25L	1160-1 477 (500-1)		1160-1⅜ 477 (500-1⅜)	
CIRCLING	1240-1 511 (600-1)		1240-1½ 511 (600-1½)	1360-2 631 (700-2)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026