RNAV (GPS) RWY 19R

GENERAL MITCHELL INTL (MKE)

WAAS	APP CRS	Rwy Ldg	9205
CH 99322	191°	TDZE	672
W19A		Apt Elev	728


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅜ SM, LNAV Cats C/D visibility to 1⅜ SM. *RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR


MISSED APPROACH: Climb to 2000 then climbing right turn to 2800 direct BAE VOR/DME and hold.

D-ATIS	MILWAUKEE APP CON	MILWAUKEE TOWER	GND CON
126.4	126.5 307.0	124.575 269.05	121.8 263.125

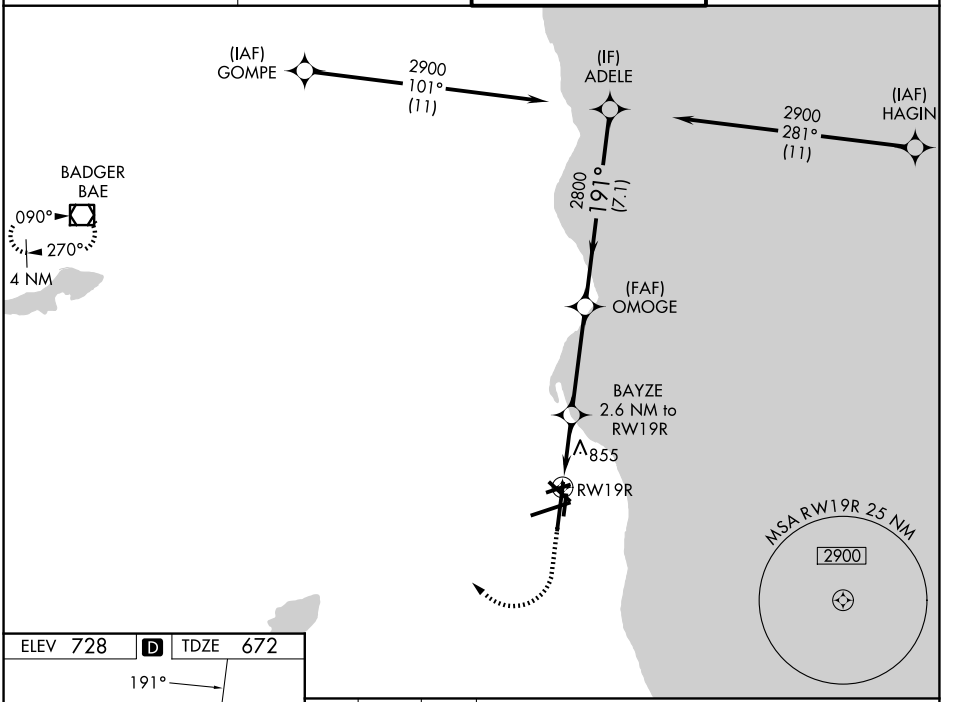

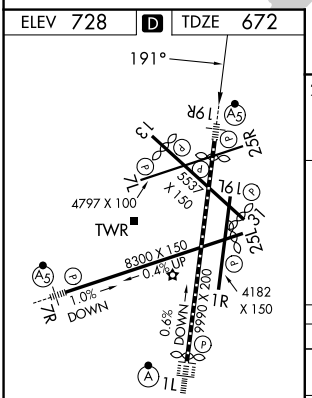

TDZL/RCLS Rwy 1L
REIL Rwys 1R, 7L, 13, 25R, 25L and 31
HIRL Rwys 1L-19R and 7R-25L
MIRL Rwys 1R-19L, 13-31, and 7L-25R

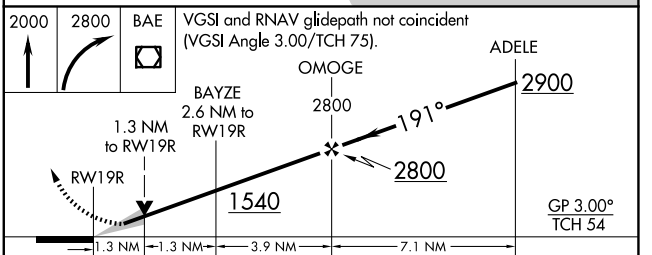

CATEGORY	A	B	C	D
LPV DA*	872/24 200 (200-½)			
LNAV/VNAV DA	1160/50 488 (500-1)			
LNAV MDA	1160/24 488 (500-½)		1160/50 488 (500-1)	
CIRCLING	1240-1 512 (600-1)		1240-1½ 512 (600-1½)	1360-2 632 (700-2)

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026