RNAV (RNP) Y RWY 30R

MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

APP CRS	Rwy Ldg	8000
301°	TDZE	822
	Apt Elev	842


RNP AR APCH - GPS. Authorization required. From HIGHA: RF.

For uncompensated Baro-VNAV systems, procedure NA below -20°C or above 54°C. Inop table does not apply to RNP 0.15. Simultaneous approach authorized.

MALSF

MISSED APPROACH: Climb to 1300 then climbing right turn to 3000 direct GEP VORTAC and hold.

D-ATIS	MINNEAPOLIS APP CON	MINNEAPOLIS TOWER	GND CON
135.35 239.275	118.725 335.65 (35)	123.675 273.55 (17-35)	121.8 348.6 (N)
	119.3 335.65 (4-22, 12L-30R, 17)	123.95 273.55 (12L-30R)	121.9 348.6 (S)
	126.95 335.65 (12R-30L)	126.7 273.55 (4-22, 12R-30L)	127.925 348.6 (W)

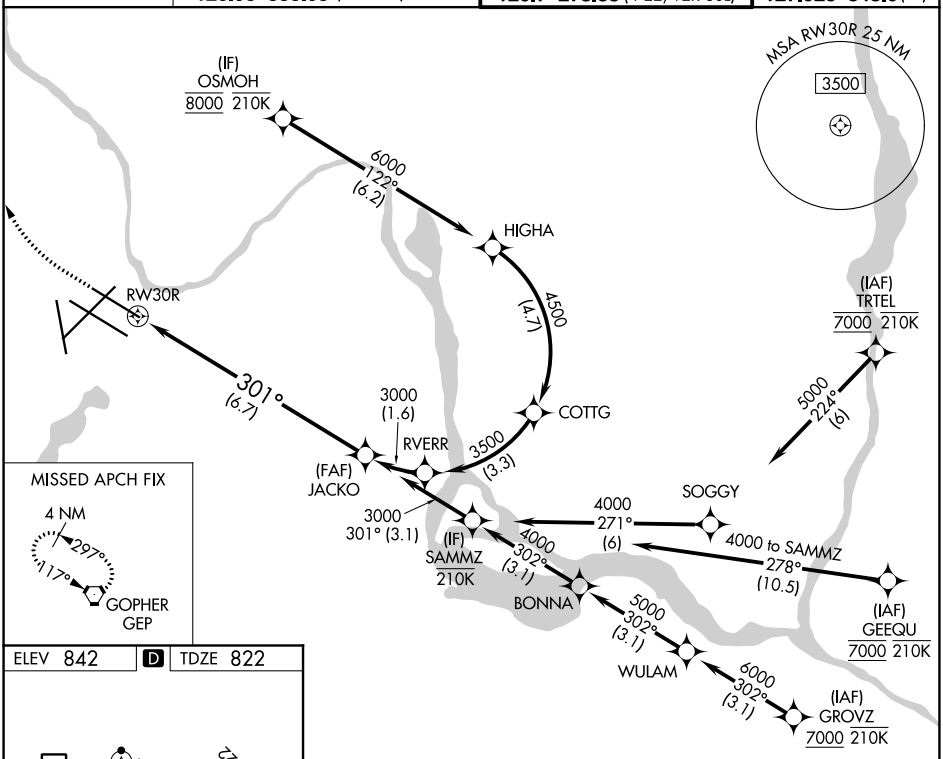

MISSED APCH FIX


4 NM

297°

117°

GOPHER
GEP

ELEV 842 D TDZE 822




HIRL all rwys
REIL Rwy 17
TDZL/RCLS Rwys 12L, 12R, 30L, and 35

1300	3000	GEP

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

See planview for multiple IF locations.

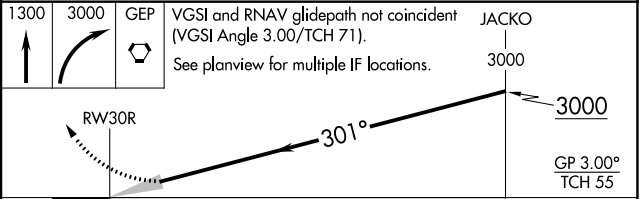

CATEGORY	A	B	C	D
RNP 0.15 DA	1097/50 275 (300-1)			
RNP 0.30 DA	1298/60 476 (500-1¼)			

AUTHORIZATION REQUIRED

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026