RNAV (GPS) Z RWY 35

MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

WAAS	APP CRS	Rwy Ldg	8000
CH 90128	350°	TDZE	834
W35A		Apt Elev	842


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500 and LNAV Cats C and D visibility to 1⅜ SM.

ALSF-2


MISSED APPROACH: Climb to 3000 direct CHETZ and on track 335° to GEP VORTAC and hold.


D-ATIS	MINNEAPOLIS APP CON	MINNEAPOLIS TOWER	GND CON
135.35 239.275	118.725 335.65 (35) 119.3 335.65 (4-22, 12L-30R, 17) 126.95 335.65 (12R-30L)	123.675 273.55 (17-35) 123.95 273.55 (12L-30R) 126.7 273.55 (4-22, 12R-30L)	121.8 348.6 (N) 121.9 348.6 (S) 127.925 348.6 (W)

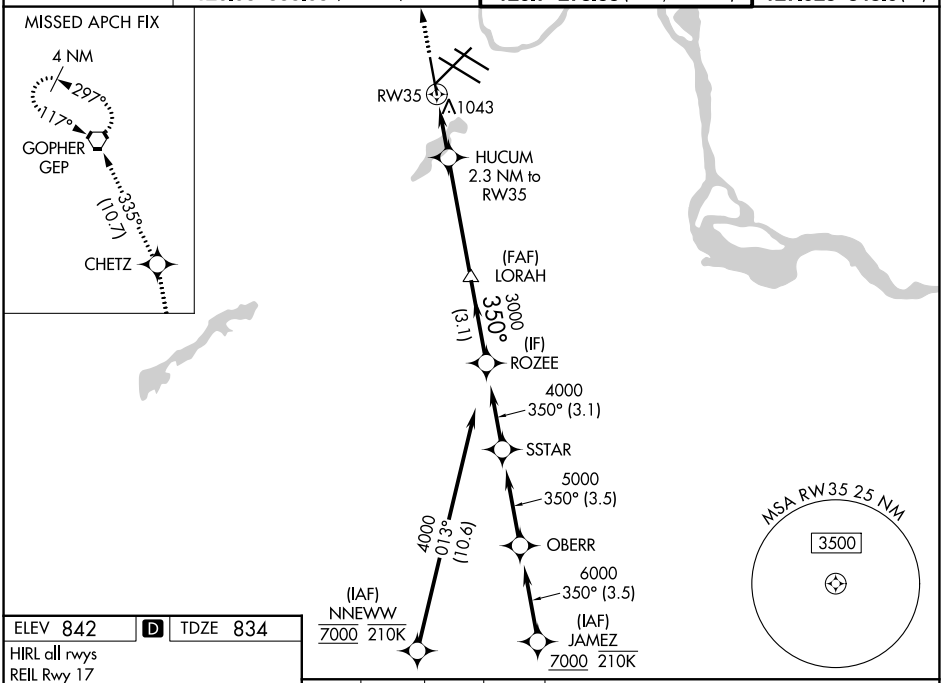

ELEV 842 | D | TDZE 834

HIRL all rwys
REIL Rwy 17
TDZL/RCLS Rwys 12L, 12R, 30L, and 35

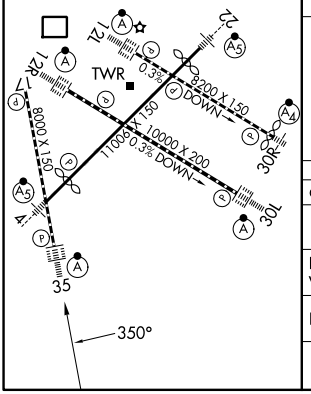

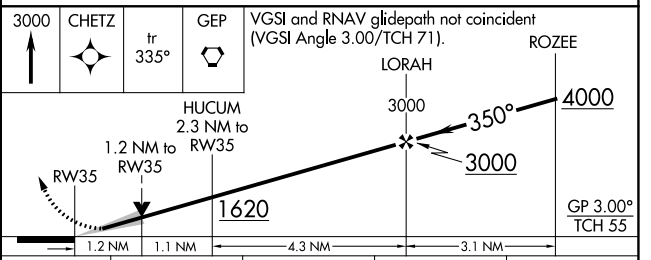

CATEGORY	A	B	C	D
LPV DA	1034/18 200 (200-½)			
LNAV/VNAV DA	1204/35 370 (400-⅝)			
LNAV MDA	1300/24 466 (500-½)		1300/50 466 (500-1)	
CIRCLING	1360-1 518 (600-1)		1460-1¾ 618 (700-1¾)	1620-2½ 778 (800-2½)

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026