RNAV (RNP) Z RWY 12

MISSOULA MONTANA (MSO)

APP CRS	Rwy Ldg	9501
117°	TDZE	3200
	Apt Elev	3206


RNP AR APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21° C (-6°F) or above 43°C (109°F).
For inop ALS, increase RNP 0.12 all Cats visibility to RVR 6000. For inop ALS, increase RNP 0.30 all Cats visibility to 2½ SM.
When local weather not received, procedure NA.
-11°C


MALSR

MISSED APPROACH: Climb to 13000 on track 117° to OKASE and on track 123° to TAGOE and hold, continue climb-in-hold to 13000.
*Missed approach requires minimum climb of 350 feet per NM to 8300; if unable to meet climb gradient, see RNAV (GPS) Y RWY 12.
#Missed approach requires minimum climb of 425 feet per NM to 8300.

ATIS	SPOKANE APP CON ★	MISSOULA TOWER ★	GND CON	UNICOM
126.65	124.9 298.95	118.4 (CTAF) L 377.175	121.9	122.95

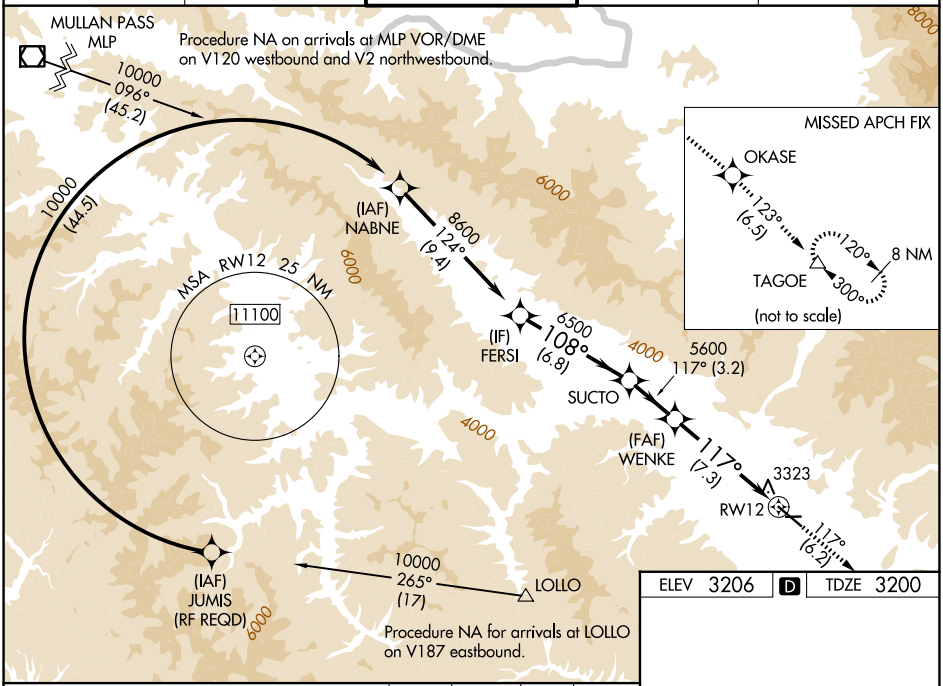

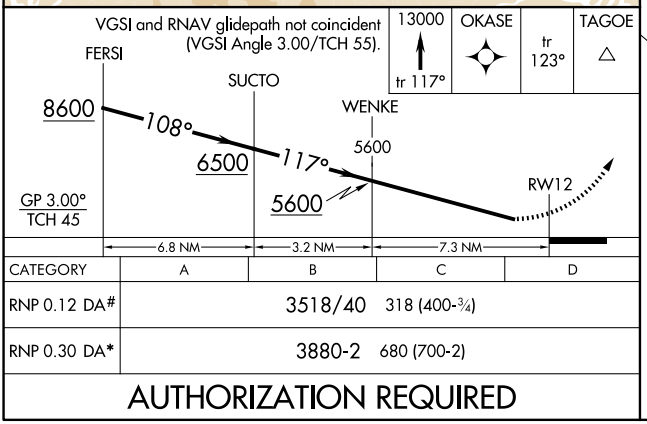

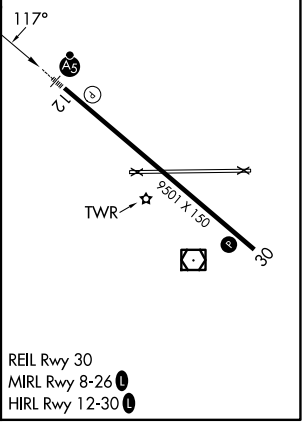

CATEGORY	A	B	C	D
RNP 0.12 DA#	3518/40	318 (400-¾)		
RNP 0.30 DA*	3880-2	680 (700-2)		

AUTHORIZATION REQUIRED

REIL Rwy 30
MIRL Rwy 8-26 L
HIRL Rwy 12-30 L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026