RNAV (GPS) RWY 32

MOBILE INTL (BFM)

WAAS	APP CRS	Rwy Ldg	9618
CH 70304	320°	TDZE	25
W32A		Apt Elev	26

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000, and LNAV Cats C/D visibility to RVR 5500.


MALSR

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct WORIR and hold.


ATIS	MOBILE APP CON ★	INTERNATIONAL TOWER ★	GND CON	UNICOM
135.575	118.5 269.3	118.8 (CTAF) L 251.1	121.7 239.3	122.95

MISSED APCH FIX



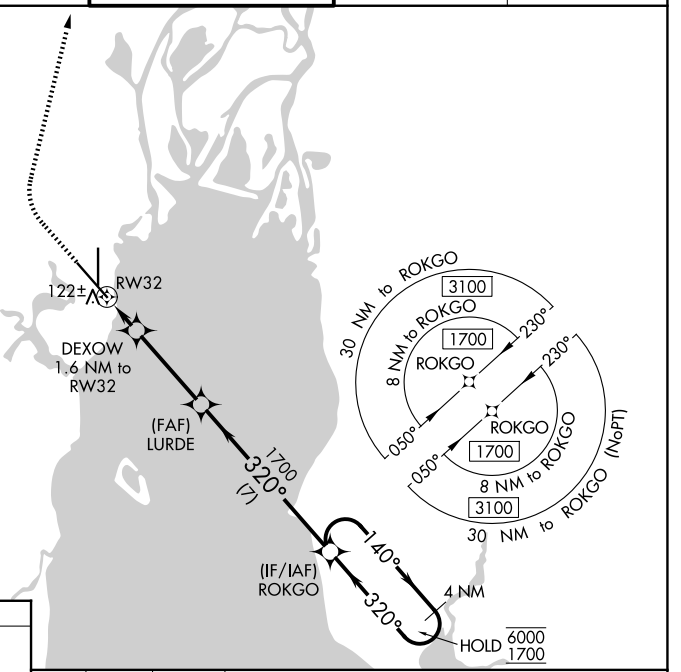


ELEV 26 TDZ 25

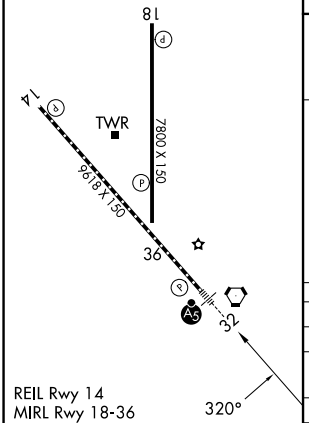

800 2000 WORIR

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 71).

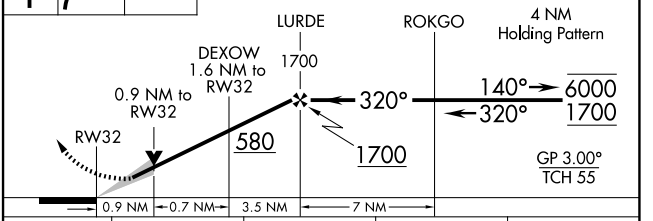

CATEGORY	A	B	C	D
LPV DA		225/18	200 (200-½)	
LNAV/VNAV DA		283/24	258 (300-½)	
LNAV MDA	380/24	355 (400-½)	380/30	355 (400-⅝)
CIRCLING	680-1	654 (700-1)	680-1¾	1100-3
			654 (700-1¾)	1074 (1100-3)

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026