RNAV (GPS) RWY 27

QUAD CITIES INTL (MLI)


WAAS	APP CRS	Rwy Ldg	10002
CH 86824	270°	TDZE	581
W27A		Apt Elev	590

T A Circling to Rwy 5 NA at night. Baro-VNAV NA when using Davenport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -26°C (-14°F) or above 40°C (104°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Davenport altimeter setting: increase LPV DA to 828 feet and LNAV/VNAV DA to 1233 feet and LNAV/VNAV visibility all Cats ⅛ SM; increase all MDA 60 feet and LNAV visibility Cats C and D ¼ SM, Circling visibility Cats C and D ¼ SM. For inoperative ALS, increase LNAV/VNAV visibility all Cats to 2 SM, LNAV visibility Cats C and D to 1⅜ SM. When using Davenport altimeter setting increase LNAV visibility Cats C and D to 1⅝ SM.
**RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 2300 direct TOCKY and hold.


ATIS	QUAD CITY APP CON *	QUAD CITY TOWER *	GND CON	UNICOM
121.2	125.95 257.8	119.4 (CTAF) L 269.55	121.9	122.95

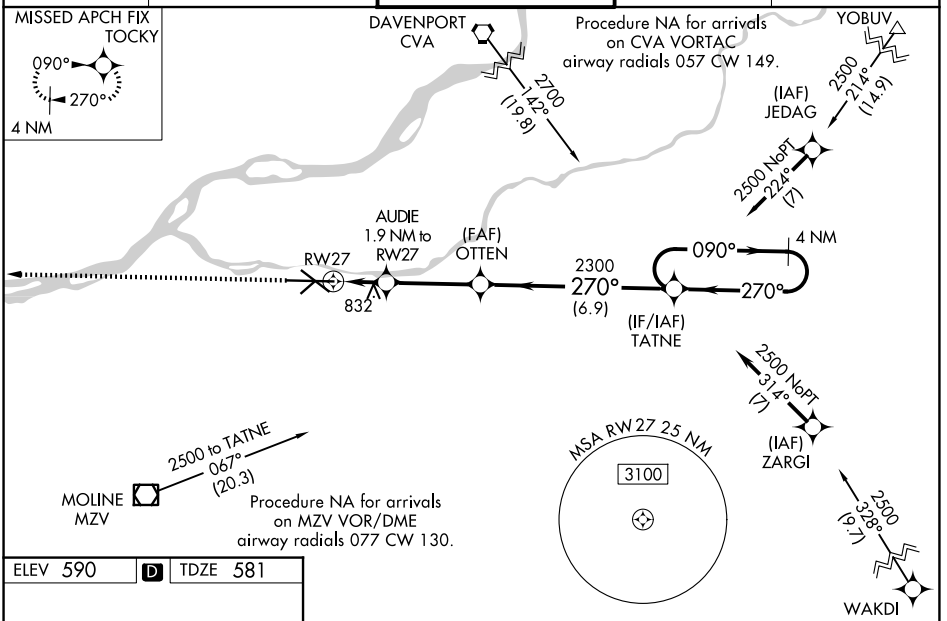


EC-3, 29 OCT 2026 to 26 NOV 2026

EC-3, 29 OCT 2026 to 26 NOV 2026

ELEV 590 D TDZE 581



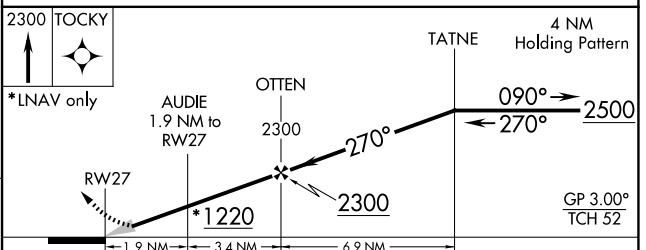

CATEGORY	A	B	C	D
LPV DA**	781/24 200 (200-½)			
LNAV/VNAV DA	1186-1⅝ 605 (600-1⅝)			
LNAV MDA	1100/24 519 (600-½)		1100/55 519 (600-1)	
CIRCLING	1140-1 550 (600-1)	1200-1 610 (700-1)	1320-2 730 (800-2)	1420-2¾ 830 (900-2¾)

MIRL Rwy 5-23
REIL Rwys 13 and 31 L
HIRL Rwys 9-27 and 13-31