RNAV (GPS) RWY 4

MONROE RGNL (MLU)

WAAS	APP CRS	Rwy Ldg	7504
CH 56410	042°	TDZE	78
W04A		Apt Elev	79


RNP APCH.


T A ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. Circling Rwy 14 NA at night.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 3000 direct LURBY and hold.


ATIS	MONROE APP CON ★	MONROE TOWER ★	GND CON	UNICOM
125.05	118.15 290.475	118.9 (CTAF) L 257.8	121.9	122.95

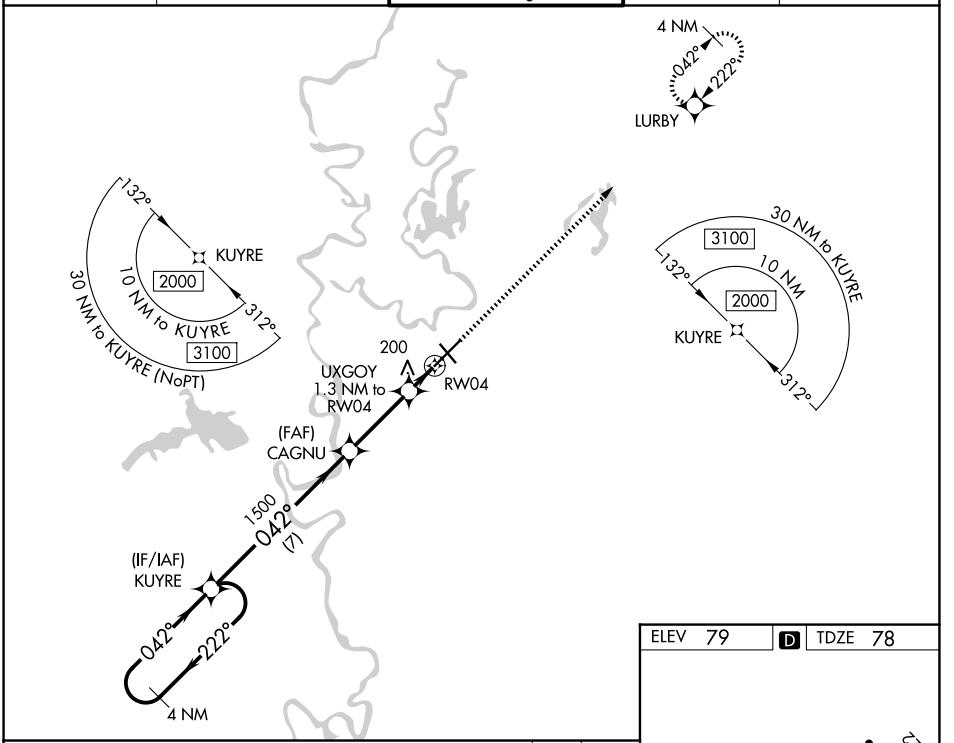

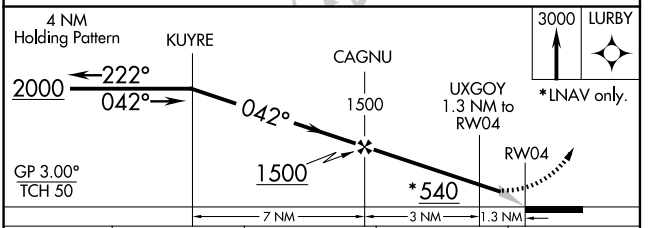

CATEGORY	A	B	C	D
LPV DA **	278/24 200 (200-½)			
LNAV/VNAV DA	383/24 305 (400-½)			
LNAV MDA	460/24 382 (400-½)		460/35 382 (400-⅝)	
CIRCLING	580-1 501 (600-1)		740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

ELEV 79 D TDZE 78



REIL Rwys 14 and 32
MIRL Rwy 14-32 L
HIRL Rwy 4-22 L

SC-4, 29 OCT 2026 to 26 NOV 2026
SC-4, 29 OCT 2026 to 26 NOV 2026