VOR RWY 22

MONROE RGNL (MLU)

VORTAC MLU	APP CRS	Rwy Ldg	7504
117.2	236°	TDZE	78
Chan 119		Apt Elev	79


DME required.


Circling Rwy 14 NA at night. Rwy 22 helicopter visibility reduction below ¾ SM NA. For inop ALS, increase S-22 Cat A/B ASR visibility to 1 SM, and Cat C/D to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct MLU VORTAC and hold, continue climb-in-hold to 3000.


ATIS	MONROE APP CON★	MONROE TOWER★	GND CON	UNICOM
125.05	118.15 290.475	118.9 (CTAF) L 257.8	121.9	122.95

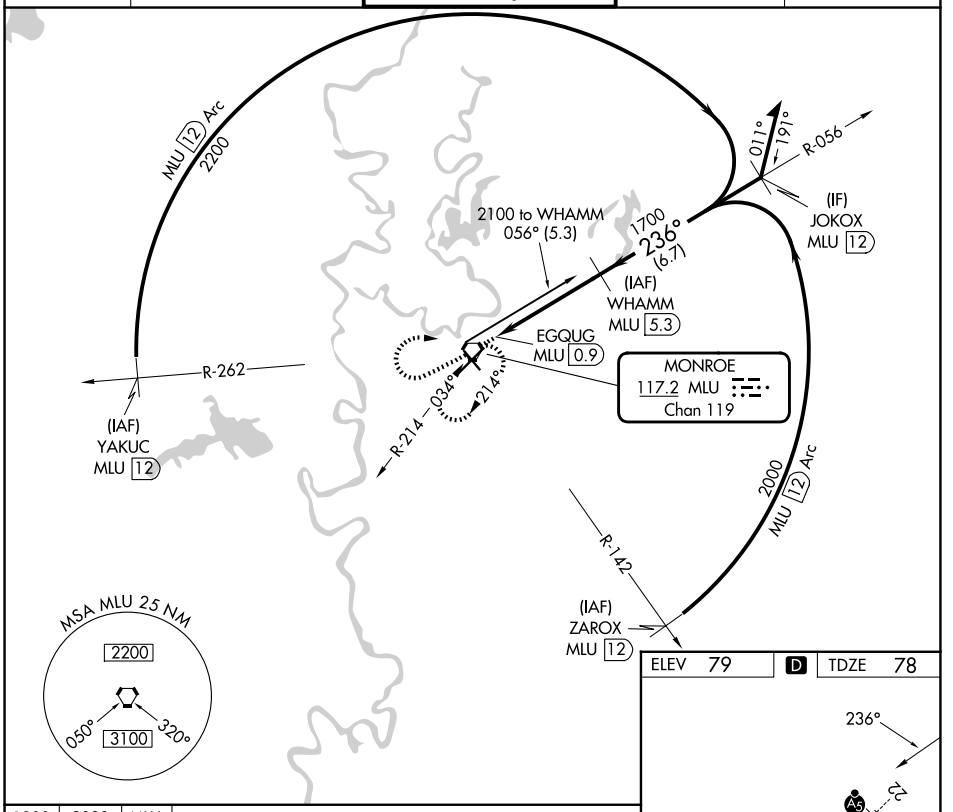

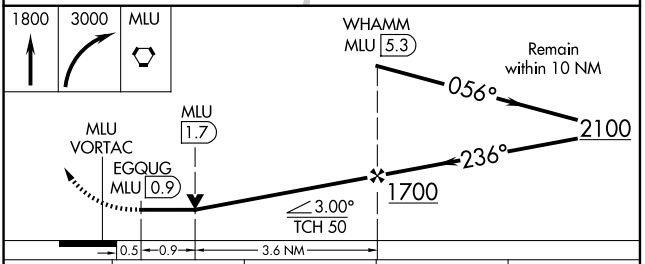

CATEGORY	A	B	C	D
S-22	560-¾ 482 (500-¾)		560-1 482 (500-1)	
CIRCLING	560-1 481 (500-1)	580-1 501 (600-1)	740-1¾ 661 (700-1¾)	1160-3 1081 (1100-3)

ELEV 79 D TDZE 78



REIL Rwys 14 and 32
MIRL Rwy 14-32 L
HIRL Rwy 4-22 L

SC-4, 29 OCT 2026 to 26 NOV 2026

SC-4, 29 OCT 2026 to 26 NOV 2026