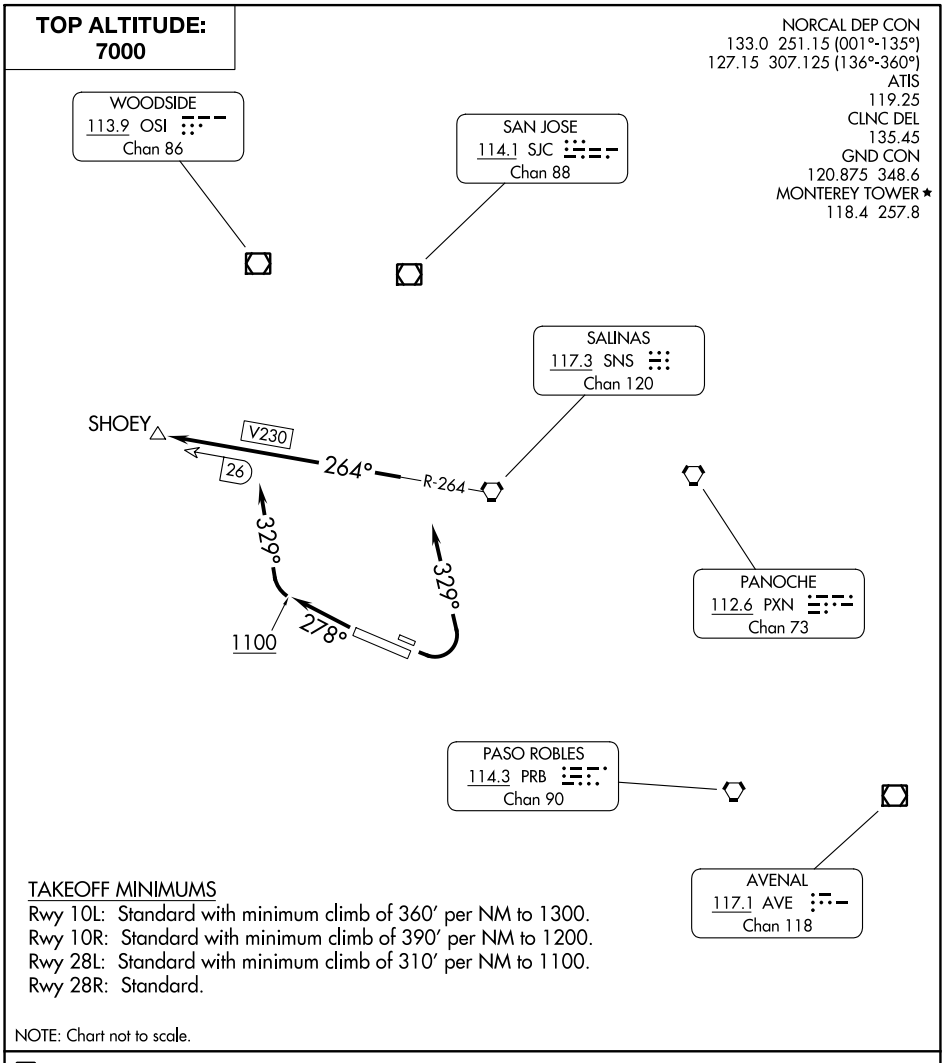

TAKEOFF MINIMUMS
Rwy 10L: Standard with minimum climb of 360′ per NM to 1300.
Rwy 10R: Standard with minimum climb of 390′ per NM to 1200.
Rwy 28L: Standard with minimum climb of 310′ per NM to 1100.
Rwy 28R: Standard.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 10L/R: Climbing left turn heading 329°. Thence. . . .

TAKEOFF RUNWAYS 28L/R: Climb heading 278° until leaving 1100 or as directed by Monterey Tower. Then climbing right turn heading 329°. Thence. . . .

. . . .intercept SNS R-264 westbound to SHOEY intersection. Maintain 7000 or assigned altitude. Expect clearance to filed altitude five minutes after departure.

SW-2, 29 OCT 2026 to 26 NOV 2026
SW-2, 29 OCT 2026 to 26 NOV 2026