RNAV (GPS) RWY 18

MYRTLE BEACH INTL (MYR)

WAAS CH 93819 W18A	APP CRS 177°	Rwy Ldg 9503 TDZE 23 Apt Elev 25


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cats C and D visibility to RVR 6000 and LNAV/VNAV all Cats visibility to RVR 6000.
*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 500 then climbing right turn to 3000 direct PLANN and hold, continue climb-in-hold to 3000.

ATIS	MYRTLE BEACH APP CON★	MYRTLE BEACH TOWER★	GND CON	UNICOM
123.925	127.4 257.95 (171° - 321°) 119.2 350.3 (322° - 170°)	128.45 (CTAF) L 259.3	120.3 275.8	122.95

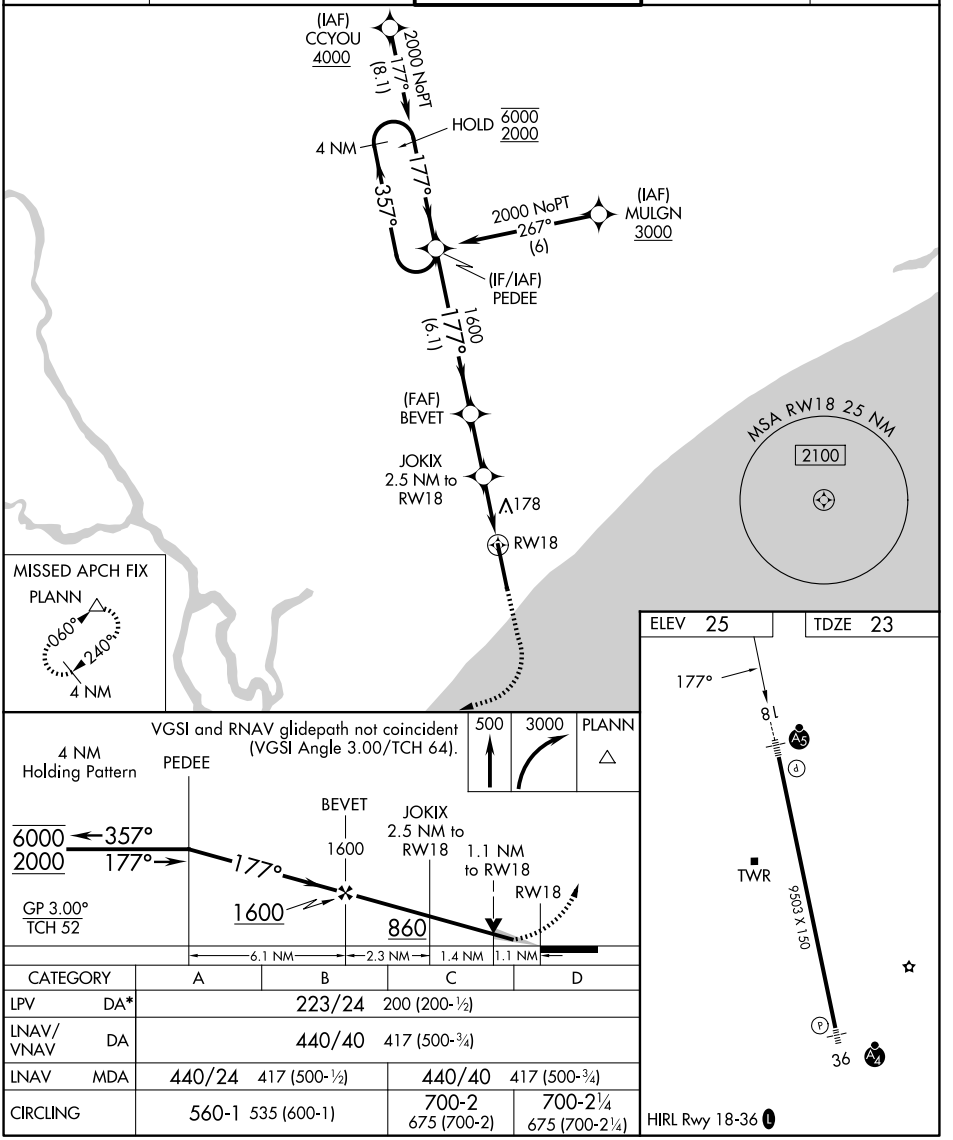

CATEGORY		A	B	C	D
LPV	DA*	223/24 200 (200-½)			
LNAV/VNAV	DA	440/40 417 (500-¾)			
LNAV	MDA	440/24 417 (500-½)		440/40 417 (500-¾)	
CIRCLING		560-1 535 (600-1)		700-2 675 (700-2)	700-2¼ 675 (700-2¼)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026