RNAV (GPS) RWY 36

MYRTLE BEACH INTL (MYR)

WAAS	APP CRS	Rwy Ldg	9503
CH 93719	357°	TDZE	25
W36A		Apt Elev	25


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Inop table does not apply to LPV. For inop ALS, increase LNAV Cats C, D visibility to 1⅜ SM.

MALSF


MISSED APPROACH: Climb to 2000 direct PEDEE and hold.

ATIS	MYRTLE BEACH APP CON ★	MYRTLE BEACH TOWER ★	GND CON	UNICOM
123.925	127.4 257.95 (171° - 321°) 119.2 350.3 (322° - 170°)	128.45 (CTAF) L 259.3	120.3 275.8	122.95

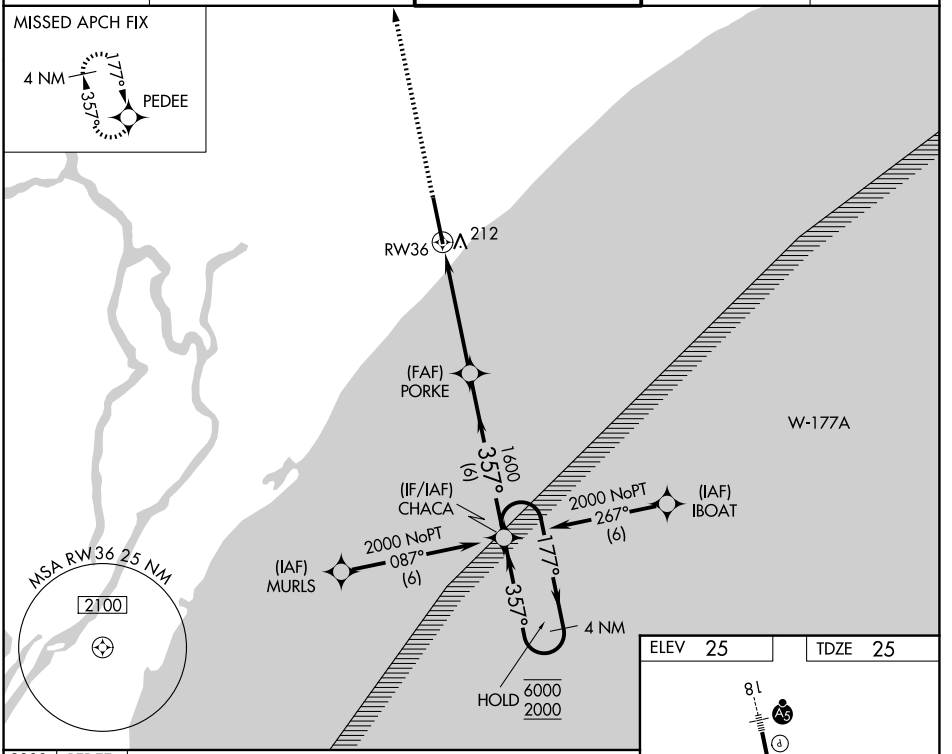

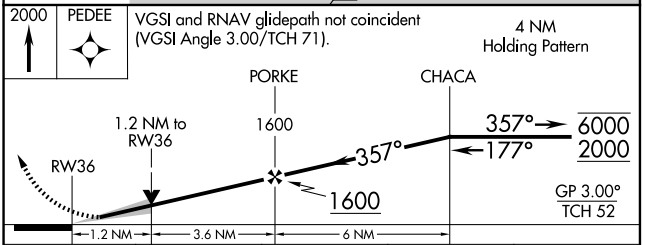

CATEGORY		A	B	C	D
LPV	DA	225/40 200 (200-¾)			
LNAV/VNAV	DA	374/40 349 (400-¾)			
LNAV	MDA	480/40 455 (500-¾)		480/55 455 (500-1)	
CIRCLING		560-1 535 (600-1)		700-2 675 (700-2)	700-2¼ 675 (700-2¼)

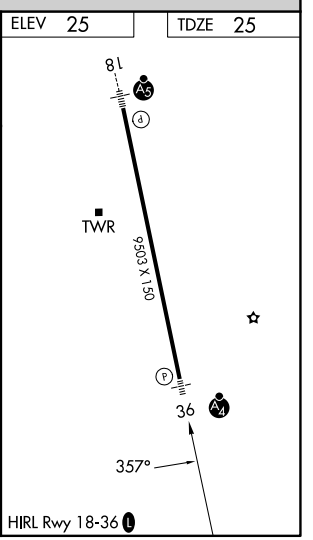

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026