WAAS	APP CRS	Rwy Ldg	5930
CH 40313	006°	TDZE	17
W01B		Apt Elev	36

RNAV (GPS) Z RWY 1L
NAPA COUNTY (APC)


RNP APCH - GPS.


T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. Inop table does not apply to LPV minimums. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM.

MALS

MISSED APPROACH: Climb to 5000 direct CIVDA and on track 326° to POPES and hold. Missed approach requires minimum climb of 420 feet per NM to 2200; if unable to meet climb gradient, see RNAV (GPS) Y RWY 1L.


ATIS	OAKLAND CENTER	NAPA TOWER*	GND CON	UNICOM
124.05	127.8 353.5	118.7 L (CTAF) 257.8	121.7	122.95

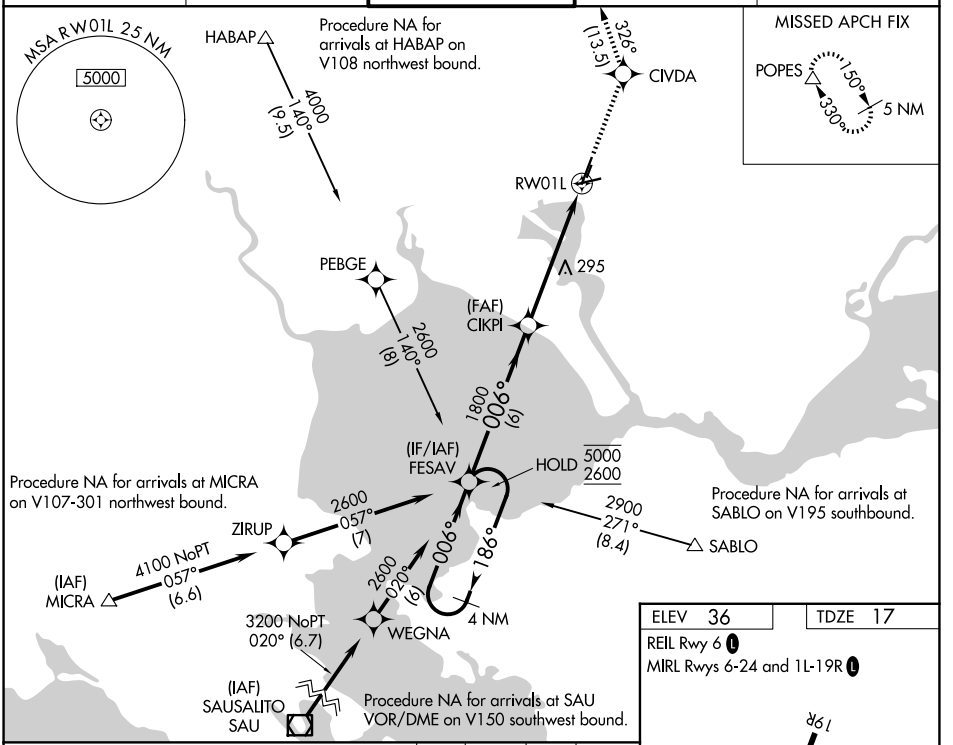

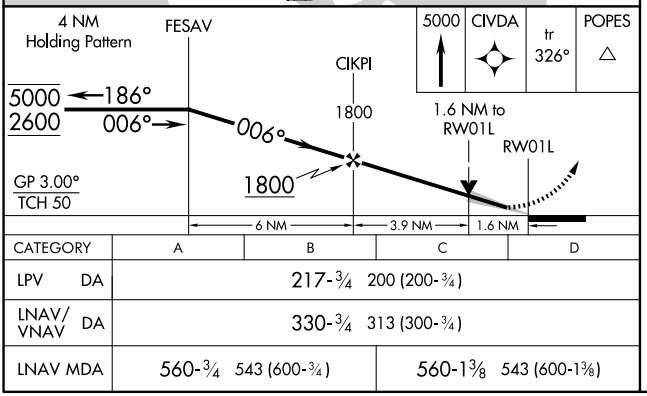

CATEGORY	A	B	C	D
LPV DA	217-¾ 200 (200-¾)			
LNAV/VNAV DA	330-¾ 313 (300-¾)			
LNAV MDA	560-¾ 543 (600-¾)		560-1⅜ 543 (600-1⅜)	

ELEV 36	TDZE 17
REIL Rwy 6 L	
MIRL Rwys 6-24 and 1L-19R L	

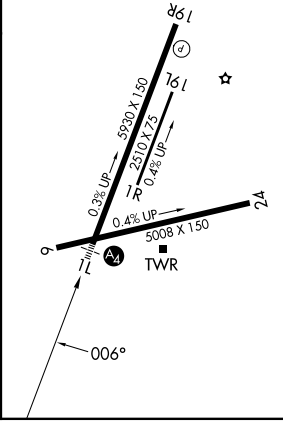

SW-2, 29 OCT 2026 to 26 NOV 2026
SW-2, 29 OCT 2026 to 26 NOV 2026