APP CRS	Rwy Ldg	8000
201°	TDZE	551
	Apt Elev	599

RNAV (RNP) Z RWY 20L

NASHVILLE INTL (BNA)

RNP AR APCH - GPS. Authorization required. From RDNEK, TURNT, JOGLO, or SIPPO: RF.

For uncompensated Baro-VNAV systems, procedure NA below -10°C or above 54°C. Simultaneous approach authorized with Rwy 20R. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4000.

MALSR

MISSED APPROACH: Climb to 1300 then climbing left turn to 4000 direct LENON and hold.

D-ATIS	NASHVILLE APP CON	NASHVILLE TOWER	GND CON
135.1	118.4 360.7 (030°-196°) 119.35 372.0 (197°-029°)	118.6 257.8	121.9 348.6

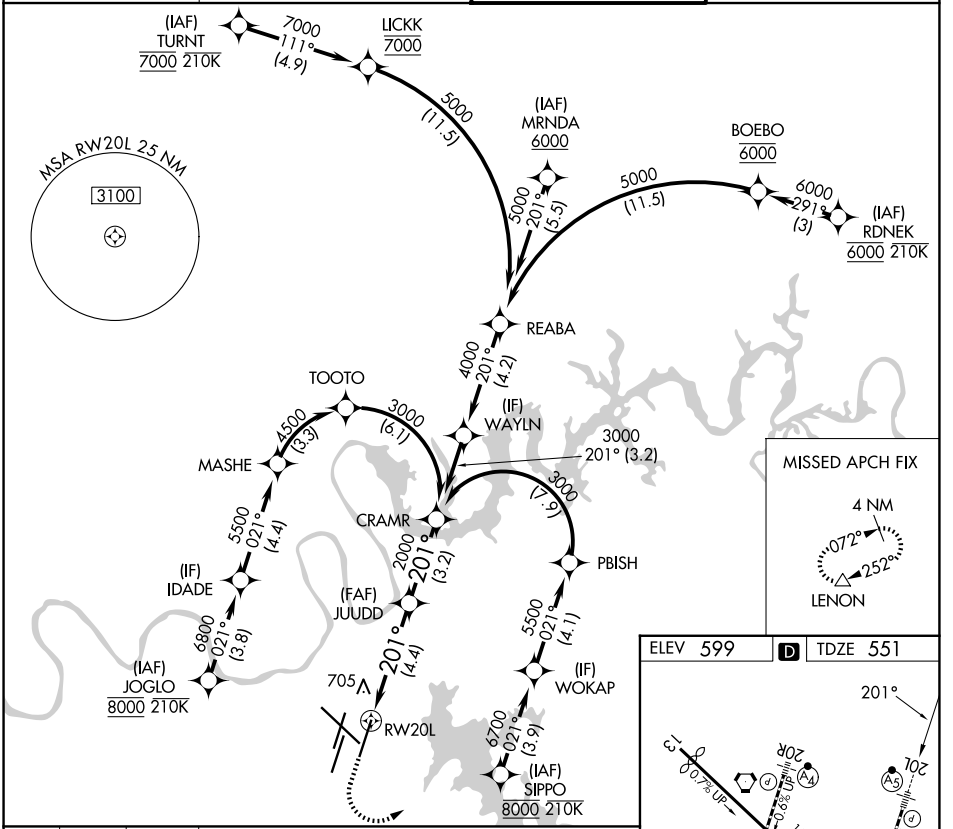

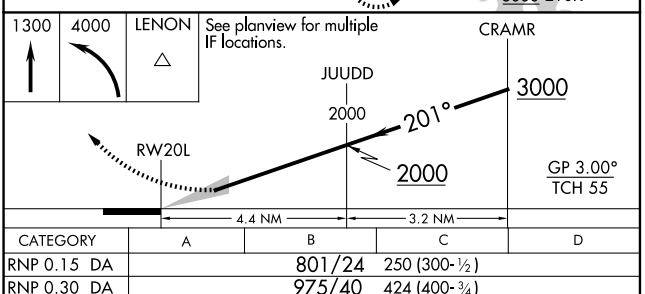

CATEGORY	A	B	C	D
RNP 0.15 DA	801/24		250 (300-½)	
RNP 0.30 DA	975/40		424 (400-¾)	

AUTHORIZATION REQUIRED

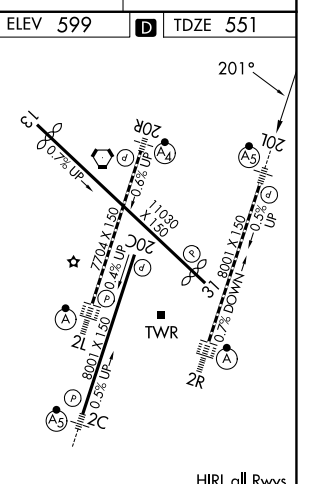

HIRL all Rwys
TDZL/RCLS Rwys 2L and 2R
REIL Rwys 13, 20C, and 31

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026