RNAV (GPS) RWY 22R

NEWARK LIBERTY INTL (EWR)

WAAS	APP CRS	Rwy Ldg	9559
CH 61244	219°	TDZE	10
W22B		Apt Elev	18


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Circling NA south of Rwy 11-29. When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Caution, departing TEB Rwy 24 traffic climbing to 1500 MSL.

MALSR


MISSED APPROACH: Climb to 2000 then climbing right turn to 3000 direct KILMA and hold.

D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON
115.7 134.825	128.55 379.9	118.3 257.6	121.8

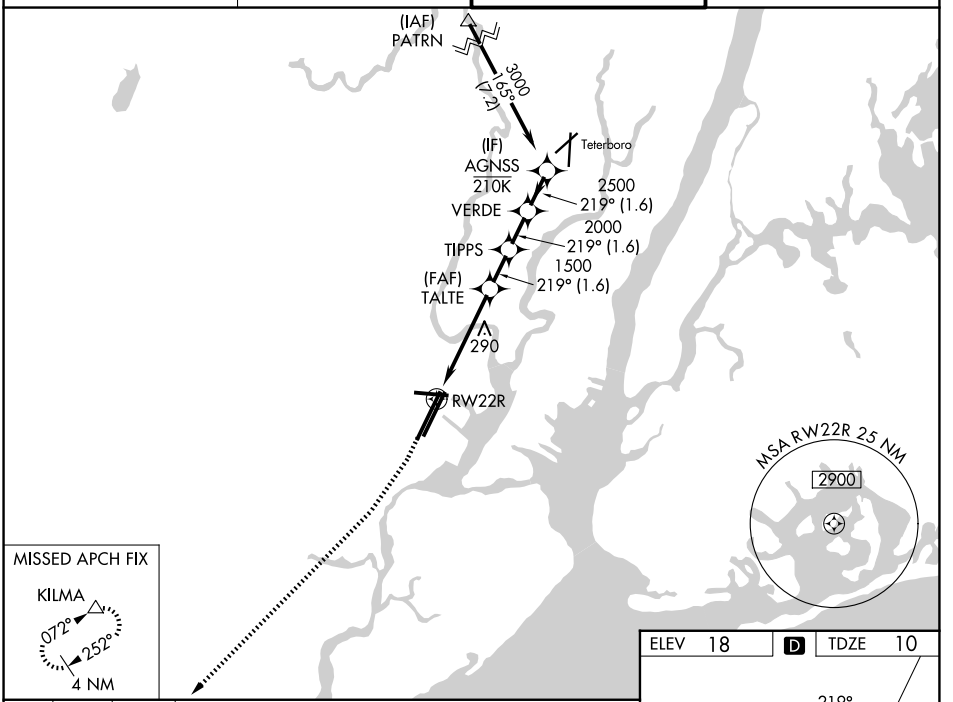

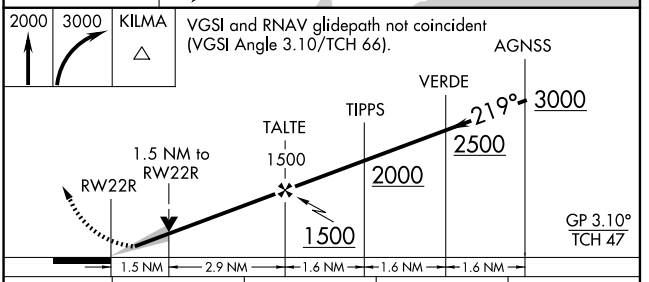

CATEGORY	A	B	C	D
LPV DA	210/18 200 (200-½)			
LNAV/VNAV DA	468/45 458 (500-⅞)			
LNAV MDA	560/24 550 (600-½)		560/60 550 (600-1¼)	
CIRCLING	660-1 642 (700-1)		900-2¾ 882 (900-2¾)	900-3 882 (900-3)

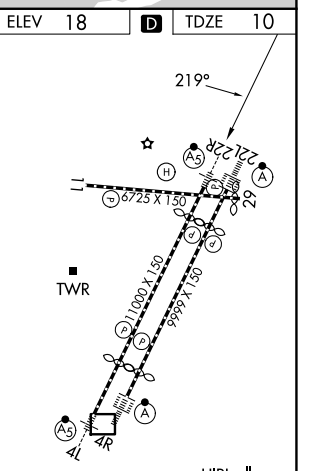

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026