RNAV (GPS) RWY 4L

NEWARK LIBERTY INTL (EWR)

WAAS CH 56224 W04A	APP CRS 039°	Rwy Ldg 8459 TDZE 10 Apt Elev 17


RNP APCH - GPS.


When Circling to Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C.

MALSR (A5)

MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 520, then climbing right turn to 2000 direct TYNIE, and on track 015° to NEBTE, cross NEBTE at or below 2000, then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.


D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON
115.7 134.825	128.55 379.9	118.3 257.6	121.8

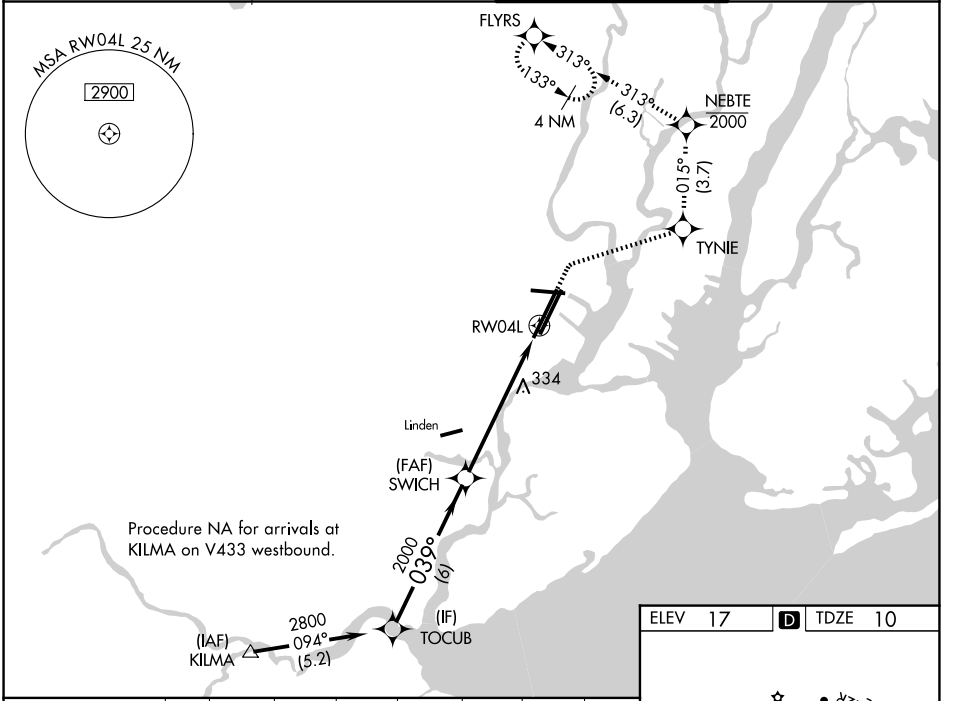

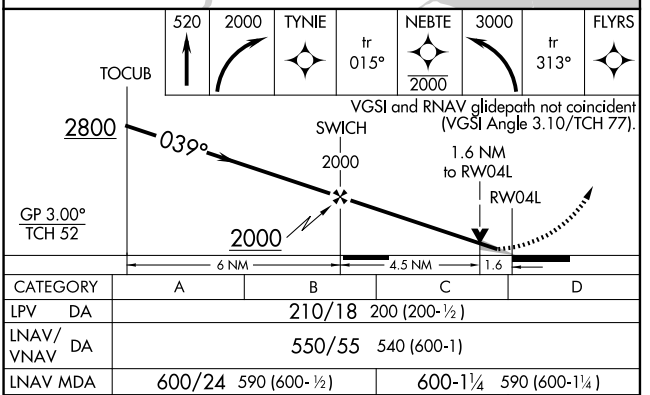

CATEGORY	A	B	C	D
LPV DA	210/18 200 (200-½)			
LNAV/VNAV DA	550/55 540 (600-1)			
LNAV MDA	600/24 590 (600-½)		600-1¼ 590 (600-1¼)	
CIRCLING	760-1 743 (800-1)		900-2¾ 883 (900-2¾)	900-3 883 (900-3)

ELEV 17 D TDZE 10

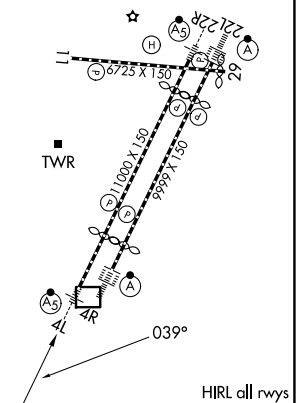

HIRL all rwys
REIL Rwys 11, 22R, and 29
TDZL/RCLS all rwys

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026