RNAV (RNP) Y RWY 29

NEWARK LIBERTY INTL (EWR)


APP CRS	Rwy Ldg	6501
288°	TDZE	10
	Apt Elev	18

RNP AR APCH. RF required.


For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. Caution, departing TEB Rwy 24 traffic climbing to 1500' MSL. Straight-In Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.

MISSED APPROACH: Climb to 2000 on track 288° to MUFIE and hold. *Missed approach requires minimum climb of 417 feet per NM to 800.


D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON
115.7 134.825	128.55 379.9	118.3 257.6	121.8

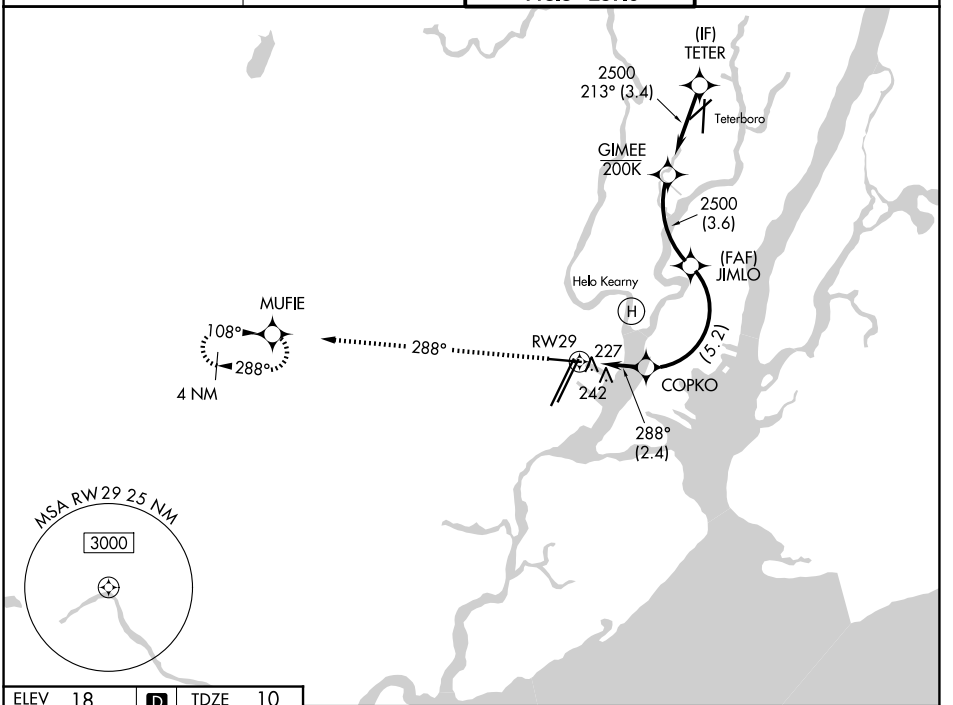

ELEV 18	D	TDZE 10



HIRL all rwys
REIL Rwys 11, 22R, and 29
TDZL/RCLS all rwys

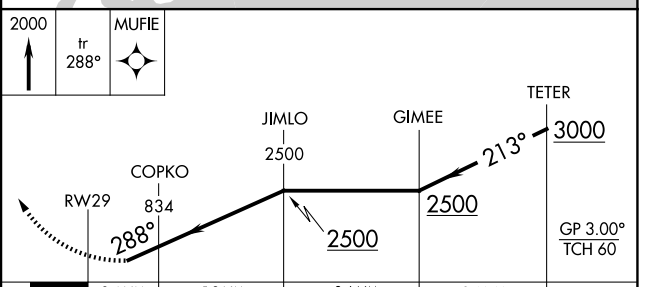

CATEGORY	A	B	C	D
RNP 0.16 DA		461-1⅜	451 (500-1⅜)	
RNP 0.30 DA*		583-1⅝	573 (600-1⅝)	
RNP 0.30 DA		625-1¾	615 (700-1¾)	

AUTHORIZATION REQUIRED

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026