# RNAV (RNP) Z RWY 29

NEWARK LIBERTY INTL (EWR)

| APP CRS | Rwy Ldg | 6501 |
|---|---|---|
| 288° | TDZE | 10 |
| | Apt Elev | 18 |


RNP AR APCH. RF required.

Straight-in Rwy 29 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, procedure NA below -14°C or above 54°C .
* Missed approach requires minimum climb of 340 feet per NM to 800.


NA

MISSED APPROACH: Climb to 3000 on track 288° to JETVY and left turn to FIRSI, and on track 228° to DIRMY and hold.


| D-ATIS | NEWARK APP CON | NEWARK TOWER | GND CON |
|---|---|---|---|
| 115.7 134.825 | 128.55 379.9 | 118.3 257.6 | 121.8 |

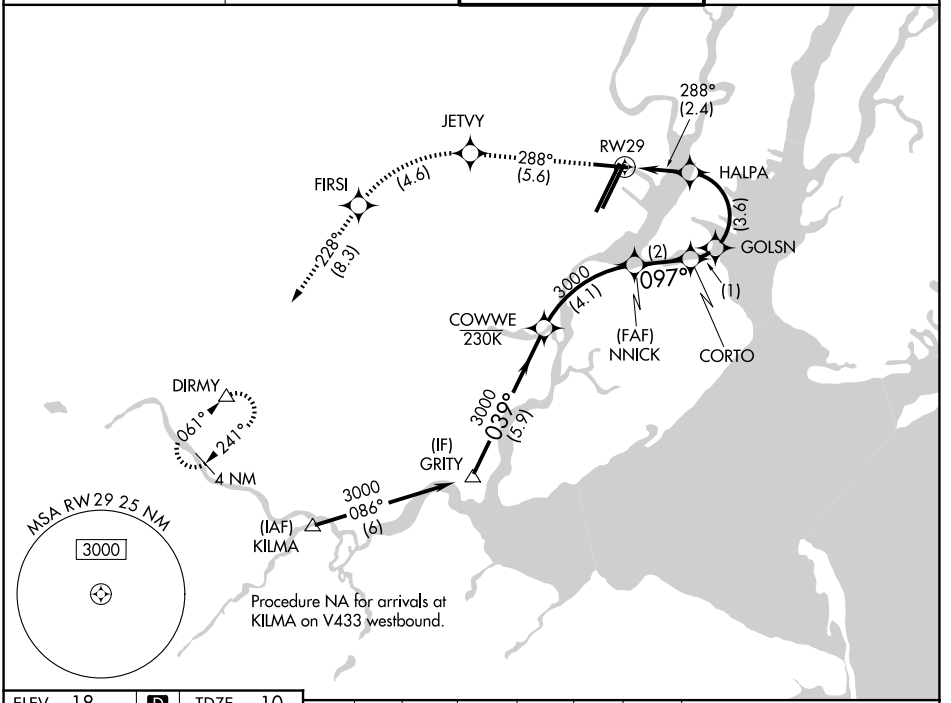


| ELEV 18 | D | TDZE 10 |
|---|---|---|




HIRL all rwys
REIL Rwys 11, 22R, and 29
TDZL/RCLS all rwys

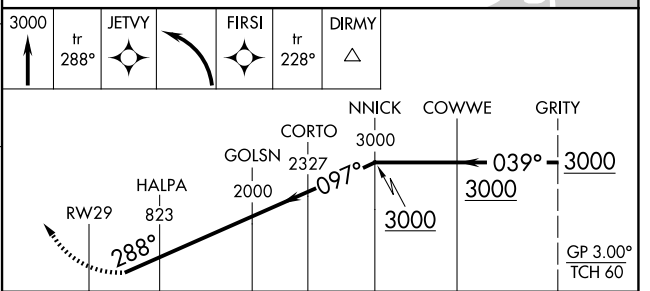


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| RNP 0.16 DA | 466-1½ | 456 (500-1½) | | NA |
| *RNP 0.30 DA | 485-1½ | 475 (500-1½) | | NA |
| RNP 0.30 DA | 573-2 | 563 (600-2) | | NA |

AUTHORIZATION REQUIRED



NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026