RNAV (RNP) Z RWY 4R

NEWARK LIBERTY INTL (EWR)

APP CRS	Rwy Ldg	8809
039°	TDZE	11
	Apt Elev	17

RNP AR APCH.


RADAR required.


For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. For inop ALS, increase RNP 0.30 all Cats visibility to 1⅜ SM.


ALSF-2

MISSED APPROACH: (Do not exceed 210K until NEBTE) Climb to 560 then climbing right turn to 2000 direct TYNIE and left turn on track 015° to NEBTE, cross NEBTE at or below 2000 then climbing left turn to 3000 on track 313° to FLYRS and hold, continue climb-in-hold to 3000.
* Missed approach requires minimum climb of 351 feet per NM to 660.

D-ATIS	NEWARK APP CON	NEWARK TOWER	GND CON
115.7 134.825	128.55 379.9	118.3 257.6	121.8

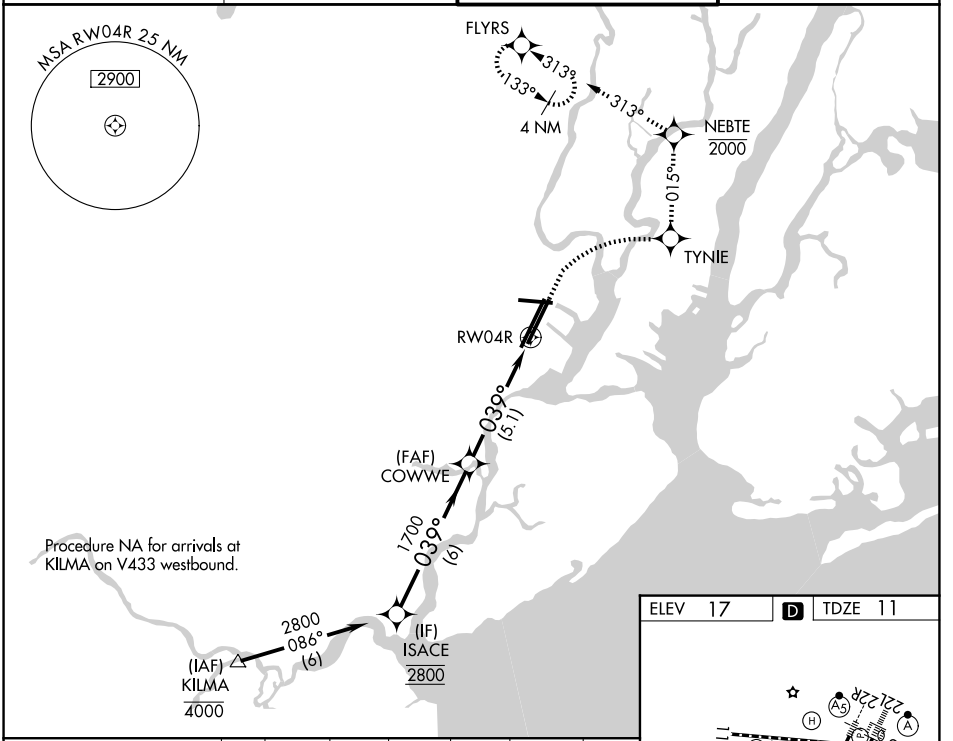



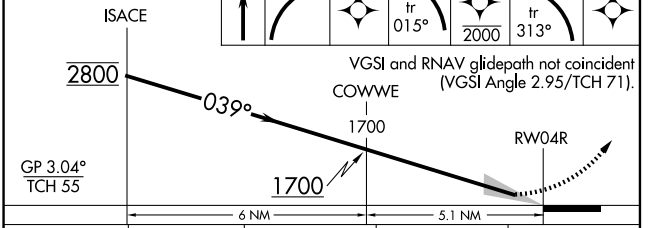


VGSI and RNAV glidepath not coincident (VGSI Angle 2.95/TCH 71).

CATEGORY	A	B	C	D
RNP 0.15 DA*	396/35 385 (400-⅝)			
RNP 0.30 DA	490/50 479 (500-1)			

AUTHORIZATION REQUIRED

ELEV 17 D TDZE 11

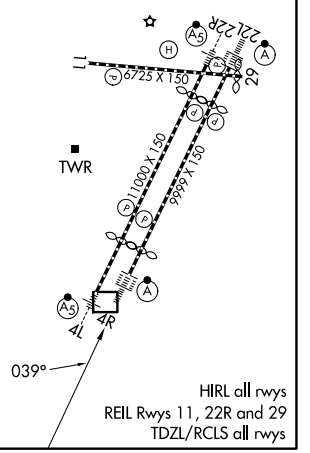

HIRL all rwys
REIL Rwys 11, 22R and 29
TDZL/RCLS all rwys

NE-2, 29 OCT 2026 to 26 NOV 2026
NE-2, 29 OCT 2026 to 26 NOV 2026