RNAV (GPS) Z RWY 23

NORFOLK INTL (ORF)

WAAS	APP CRS	Rwy Ldg	8995
CH 56322	227°	TDZE	26
W23A		Apt Elev	26


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility all Cats to 1 SM.

MALSR


MISSED APPROACH: Climb to 2000 direct CALEY and hold.

ATIS	NORFOLK APP CON	NORFOLK TOWER	GND CON
127.15	118.9 353.7	120.8 257.8	121.9

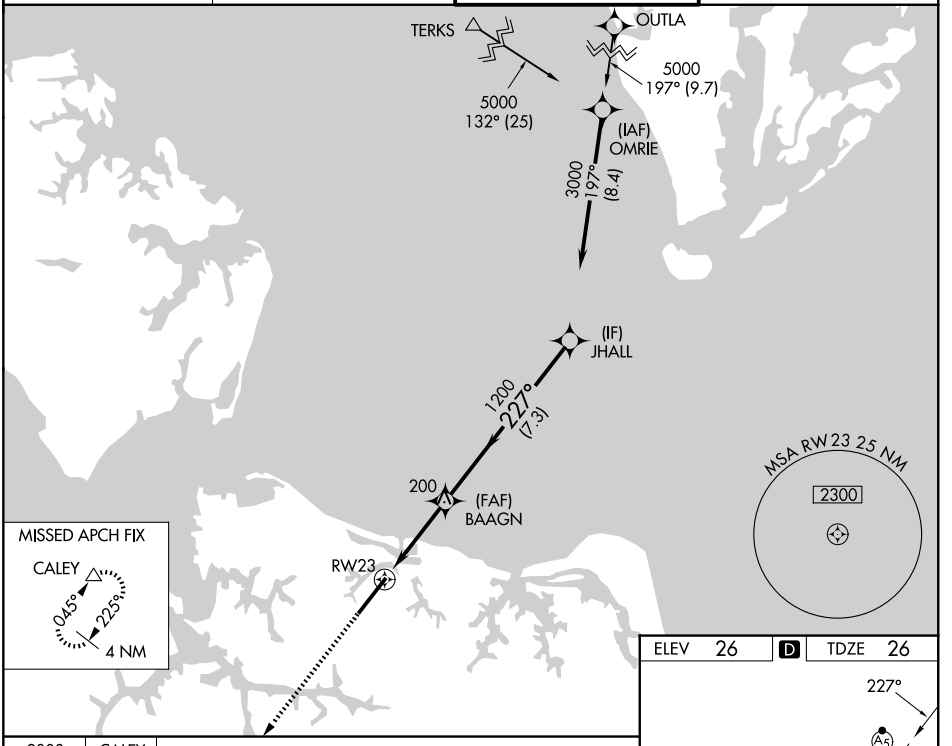

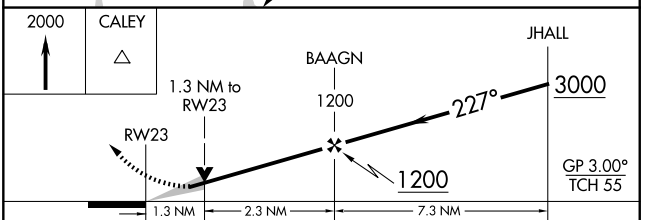

CATEGORY	A	B	C	D
LPV DA	226-½ 200 (200-½)			
LNAV/VNAV DA	403-⅝ 377 (400-⅝)			
LNAV MDA	480-½ 454 (500-½)		480-⅞ 454 (500-⅞)	
CIRCLING	480-1 454 (500-1)	540-1 514 (600-1)	540-1½ 514 (600-1½)	900-2¾ 874 (900-2¾)

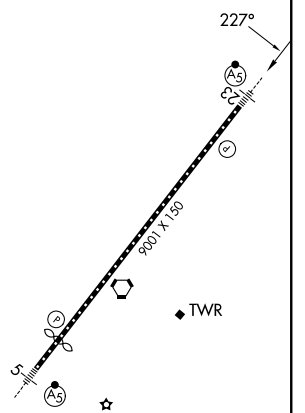

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026