RNAV (GPS) Z RWY 5

NORFOLK INTL (ORF)

WAAS	APP CRS	Rwy Ldg	7809
CH 50222	047°	TDZE	26
W05A		Apt Elev	26


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cats C and D visibility to RVR 6000. *RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR

MISSED APPROACH: Climb to 2000 direct TECHI then on track 023° to OUTLA and hold.


ATIS	NORFOLK APP CON	NORFOLK TOWER	GND CON
127.15	118.9 353.7	120.8 257.8	121.9

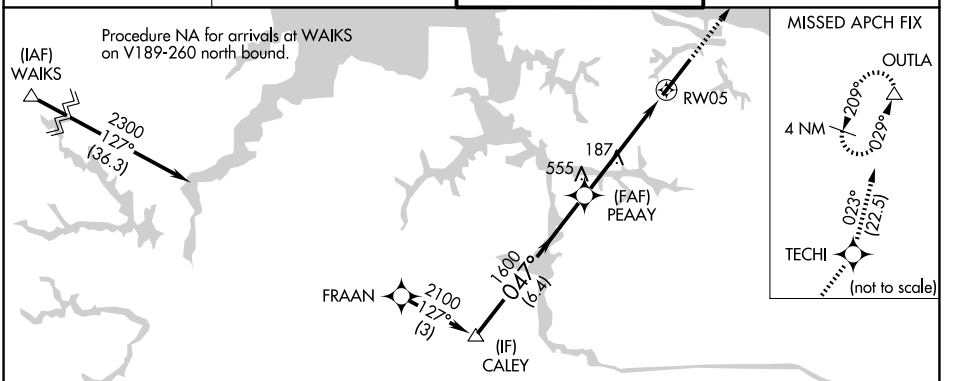

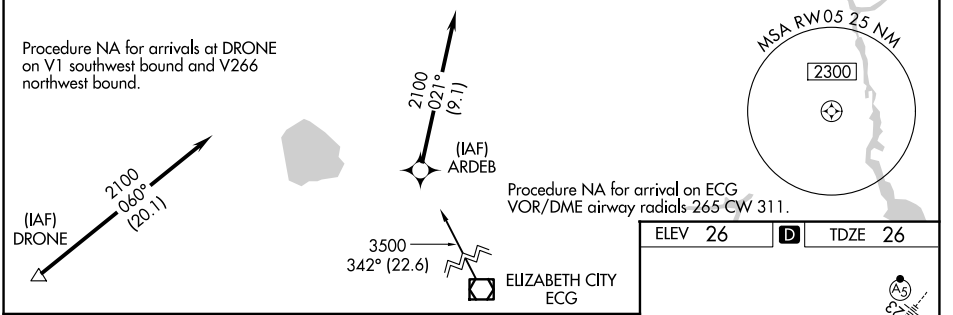

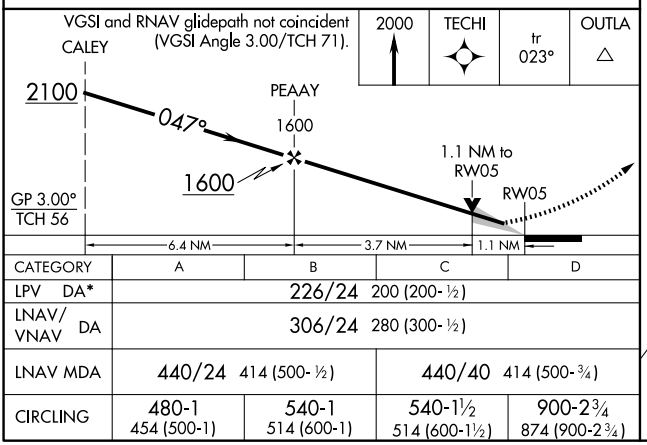

CATEGORY	A	B	C	D
LPV DA*	226/24 200 (200-½)			
LNAV/VNAV DA	306/24 280 (300-½)			
LNAV MDA	440/24 414 (500-½)		440/40 414 (500-¾)	
CIRCLING	480-1 454 (500-1)	540-1 514 (600-1)	540-1½ 514 (600-1½)	900-2¾ 874 (900-2¾)

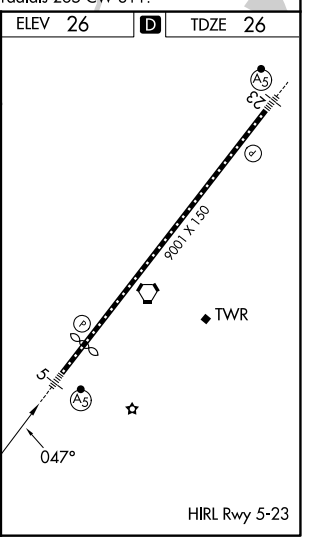

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026