RNAV (GPS) Y RWY 30

OAKLAND SAN FRANCISCO BAY (OAK)

WAAS	APP CRS	Rwy Ldg 10000
CH 93535	296°	TDZE 9
W30A		Apt Elev 9


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. For inop ALS, increase LNAV/VNAV Cats A/B/C visibility to RVR 4000, Cat D visibility to RVR 4500, and LNAV Cats C/D visibility to 1⅜ SM.

ALSF-2


MISSED APPROACH: Climb to 4000 direct PLAZA and on track 282° to SAU VOR/DME and hold, continue climb-in-hold to 4000.

D-ATIS	NORCAL APP CON	OAKLAND TOWER	GND CON
133.775	125.35 263.15	118.3 291.65 (10L/R-28L/R, 15-33) 127.2 256.9 (12-30)	121.9 (10L/R-28L/R, 15-33) 121.75 (12-30)

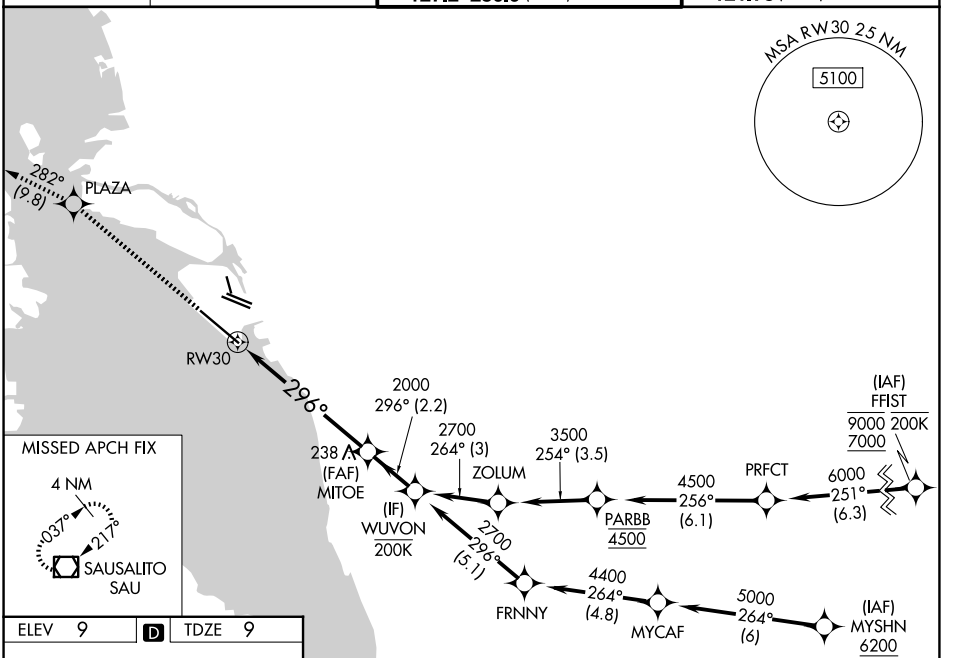

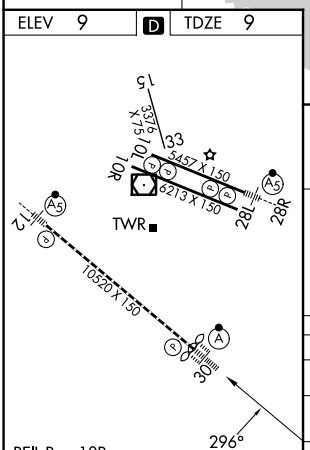

REIL Rwy 10R
TDZ/CL Rwy 30
MIRL Rwy 15-33
HIRL Rwys 12-30, 10L-28R, 10R-28L

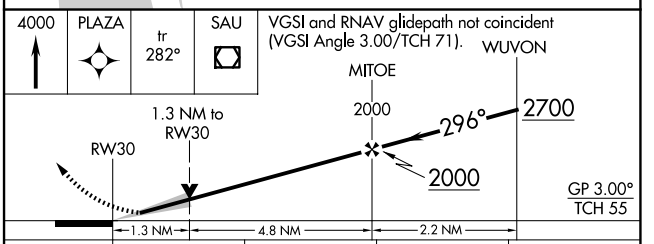

CATEGORY	A	B	C	D
LPV DA	209/18 200 (200-½)			
LNAV/VNAV DA	259/24 250 (300-½)		265/24 256 (300-½)	283/24 274 (300-½)
LNAV MDA	500/24 491 (500-½)		500/50 491 (500-1)	
CIRCLING	560-1 551 (600-1)		660-1¾ 651 (700-1¾)	1400-3 1391 (1400-3)

SW-2, 29 OCT 2026 to 26 NOV 2026
SW-2, 29 OCT 2026 to 26 NOV 2026