RNAV (GPS) RWY 36

NEW CENTURY AIRCENTER (IXD)

WAAS CH 81807 W36A	APP CRS 356°	Rwy Ldg 7339 TDZE 1066 Apt Elev 1087


RNP APCH - GPS.

For inop ALS, increase LNAV Cat C visibility to 1 SM. Inop table does not apply to LNAV Cat D. When local altimeter setting not received, use OJC altimeter setting: increase LPV DA to 1335 feet; increase all MDAs 20 feet. VDP NA when using OJC altimeter setting.


MALSR


MISSED APPROACH: Climb to 3100 direct ZODPU and hold.

ASOS	KANSAS CITY APP CON	NEW CENTURY TOWER ★	GND CON	UNICOM
135.325	118.9 251.075	133.0 (CTAF) L	124.3	122.95

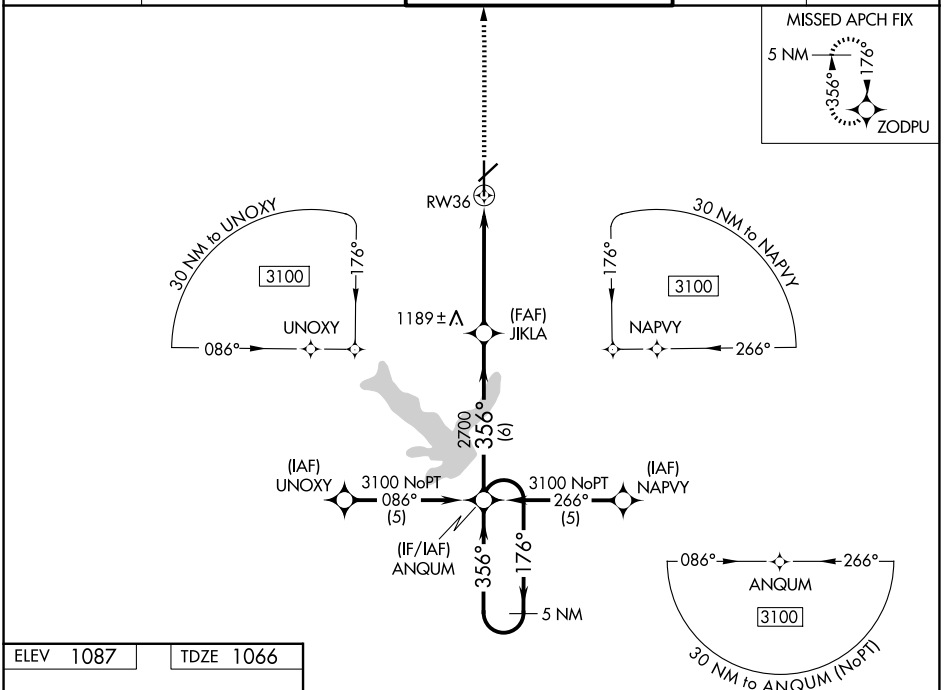

ELEV 1087 TDZE 1066

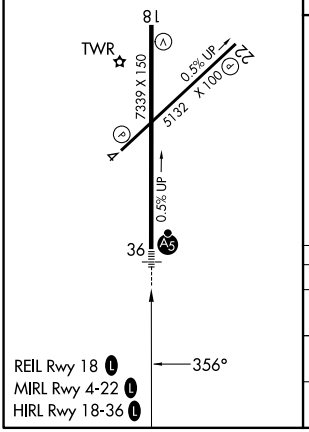

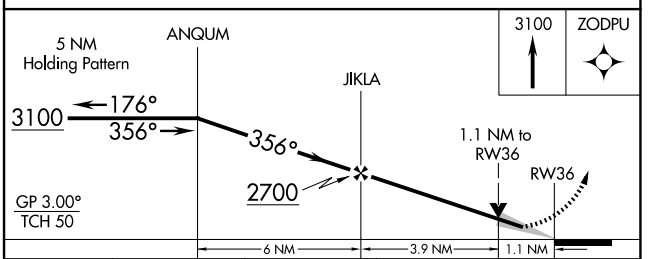

CATEGORY	A	B	C	D
LPV DA	1316-½ 250 (300-½)			
LNAV MDA	1440-½ 374 (400-½)		1440-⅝ 374 (400-⅝)	1440-1 374 (400-1)
CIRCLING	1560-1 473 (500-1)		1580-1½ 493 (500-1½)	1640-2 553 (600-2)

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026