RNAV (GPS) RWY 25

ORLANDO EXEC (ORL)


WAAS CH 58125 W25A	APP CRS 253°	Rwy Ldg 6004 / TDZE 113 / Apt Elev 113

RNP APCH - GPS.


T A Circling Rwy 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 2°C or above 54°C. In minimum visibility conditions, bright lights on highway ½ mile south of airport may be mistaken for runway lights.


MISSED APPROACH: Climb to 600 then climbing right turn to 1700 direct FTEEN and hold.

ATIS	ORLANDO APP CON	EXECUTIVE TOWER ★	GND CON	UNICOM
127.25	119.4 351.9 (7) 125.225 351.9 (25)	118.7 (CTAF) L 239.0	121.4 239.0	122.95

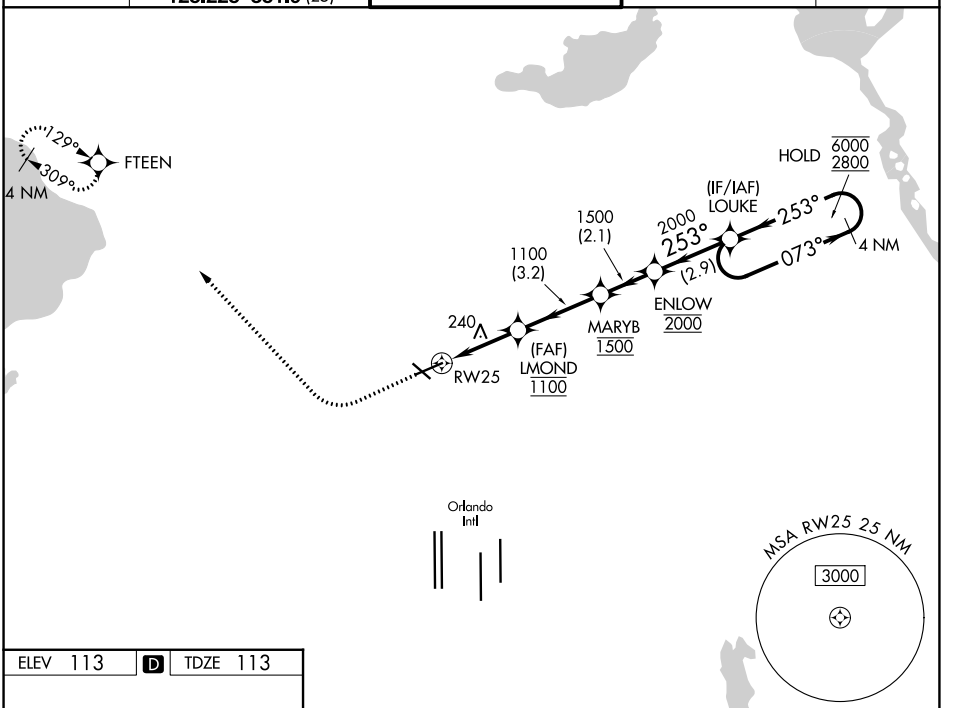

ELEV 113 D TDZE 113



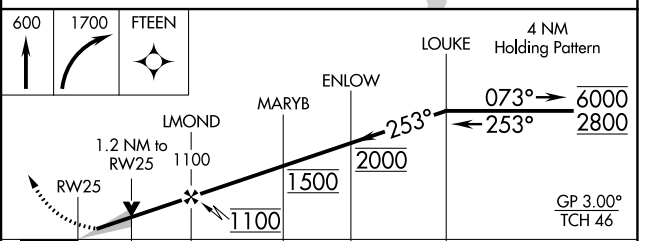

CATEGORY	A	B	C	D
LPV DA	313-¾ 200 (200-¾)			
LNAV/VNAV DA	390-⅞ 277 (300-⅞)			
LNAV MDA	500-1 387 (400-1)		500-1¼ 387 (400-1¼)	
CIRCLING	580-1 467 (500-1)	680-1 567 (600-1)	860-2¼ 747 (800-2¼)	860-2½ 747 (800-2½)

REIL Rwys 25, 13 and 31 L
HIRL Rwys 7-25 and 13-31 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026