WAAS CH 73008 W15A	APP CRS 151°	Rwy Ldg 5431	TDZE 352	Apt Elev 352

RNAV (GPS) RWY 15


RED BLUFF MUNI (RBL)


RNP APCH.

Circling to Rwy 33 NA at night. Baro-VNAV and VDP NA when using Redding altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -2°C or above 54°C. When local altimeter setting not received; use Redding altimeter setting and increase LPV DA to 674 feet and increase LNAV/VNAV DA to 860 feet and increase visibility all Cats ⅛ SM; increase all MDAs 80 feet and LNAV visibility Cats C/D ⅛ SM and Circling visibility Cats C/D ¼ SM.


MISSED APPROACH: Climb to 3500 direct TOWAN and hold.

ASOS	OAKLAND CENTER	UNICOM
120.775	132.2 350.3	123.0 (CTAF) L

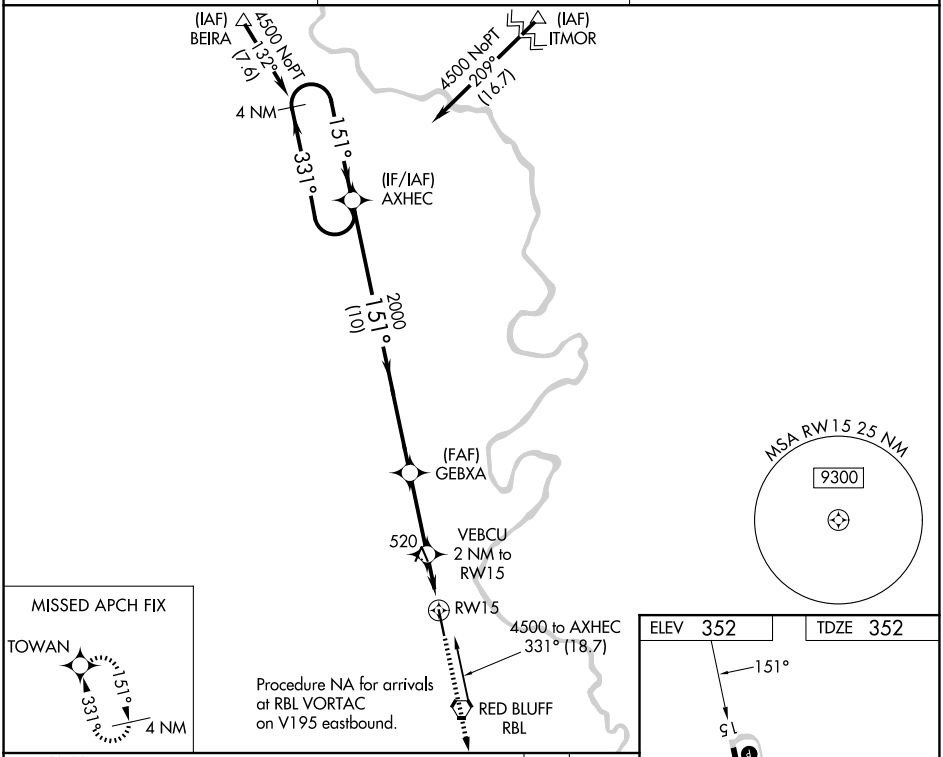

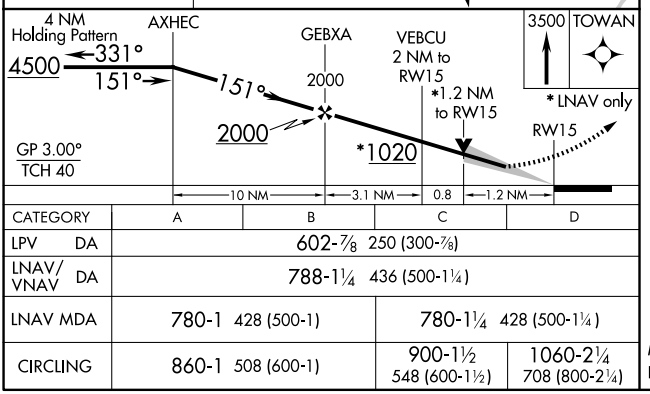

CATEGORY	A	B	C	D
LPV DA	602-⅞ 250 (300-⅞)			
LNAV/VNAV DA	788-1¼ 436 (500-1¼)			
LNAV MDA	780-1 428 (500-1)		780-1¼ 428 (500-1¼)	
CIRCLING	860-1 508 (600-1)		900-1½ 548 (600-1½)	1060-2¼ 708 (800-2¼)

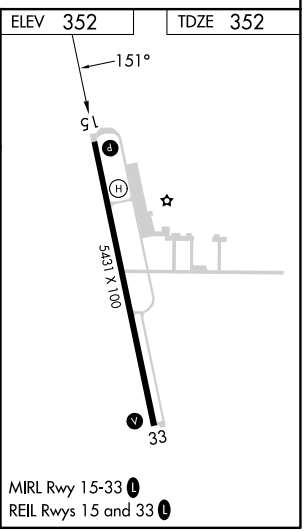

MIRL Rwy 15-33 L
REIL Rwys 15 and 33 L

SW-2, 29 OCT 2026 to 26 NOV 2026
SW-2, 29 OCT 2026 to 26 NOV 2026