VORTAC RBL	APP CRS	Rwy Ldg 5431
115.7	149°	TDZE 352
Chan 104		Apt Elev 352


VOR/DME RWY 15

RED BLUFF MUNI (RBL)

When local altimeter setting not received, use Redding altimeter setting and increase all MDAs and all Cat C/D visibility ¼ SM. VDP NA with Redding altimeter setting.

MISSED APPROACH: Climb to 2000 direct RBL VORTAC and hold.

ASOS	OAKLAND CENTER	UNICOM
120.775	132.2 350.3	123.0 (CTAF) L

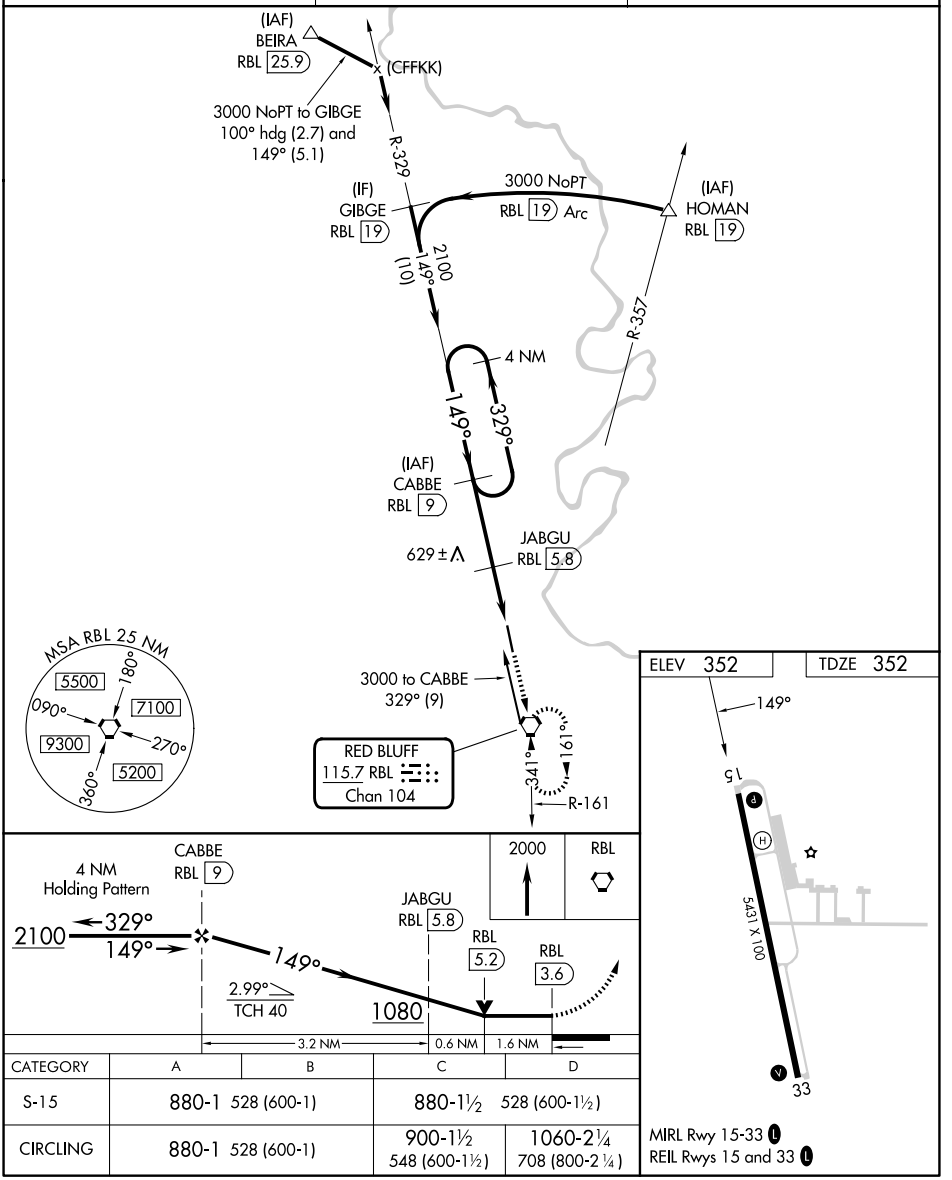

CATEGORY	A	B	C	D
S-15	880-1 528 (600-1)		880-1½ 528 (600-1½)	
CIRCLING	880-1 528 (600-1)		900-1½ 548 (600-1½)	1060-2¼ 708 (800-2¼)

MIRL Rwy 15-33 L
REIL Rwys 15 and 33 L

SW-2, 29 OCT 2026 to 26 NOV 2026
SW-2, 29 OCT 2026 to 26 NOV 2026