WAAS	APP CRS	Rwy Ldg	7006
CH 53514	108°	TDZE	3068
W11A		Apt Elev	3082

RNAV (GPS) RWY 11


ROBERTS FLD/REDMOND MUNI (RDM)


RNP APCH - GPS.

T A -16°C For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using BDN altimeter setting. When local altimeter setting not received, use BDN altimeter setting and increase LPV DA to 3349 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 3451 feet and all visibilities ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C/D ¼ SM.


MISSED APPROACH: Climb to 3600 then climbing right turn to 8500 direct URBIA and hold, continue climb-in-hold to 8500.

ATIS	SEATTLE CENTER	REDMOND TOWER *	GND CON	UNICOM
119.025	126.15 269.475	124.5 (CTAF) L 256.8	121.8	122.95

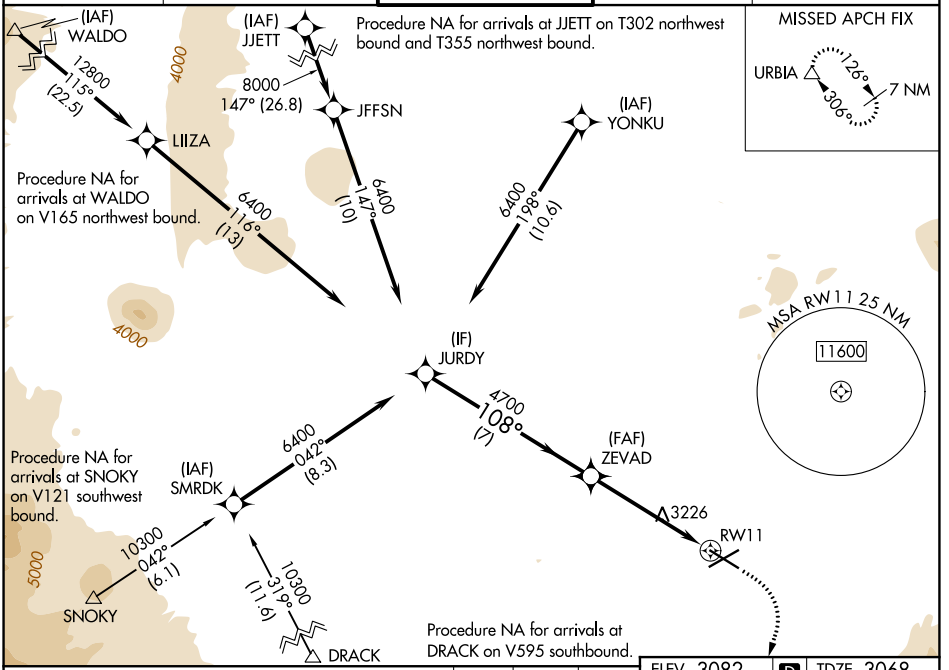

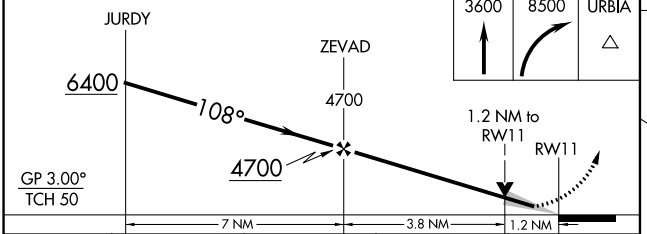

ELEV 3082 D TDZE 3068



CATEGORY	A	B	C	D
LPV DA	3268-¾ 200 (200-¾)			
LNAV/VNAV DA	3370-⅞ 302 (300-⅞)			
LNAV MDA	3480-1 412 (400-1)		3480-1⅛ 412 (400-1⅛)	
CIRCLING	3540-1 458 (500-1)	3560-1 478 (500-1)	3640-1½ 558 (600-1½)	3760-2¼ 678 (700-2¼)

REIL Rwys 5, 11, and 29 L
HIRL Rwy 5-23 L
MIRL Rwy 11-29 L

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026